

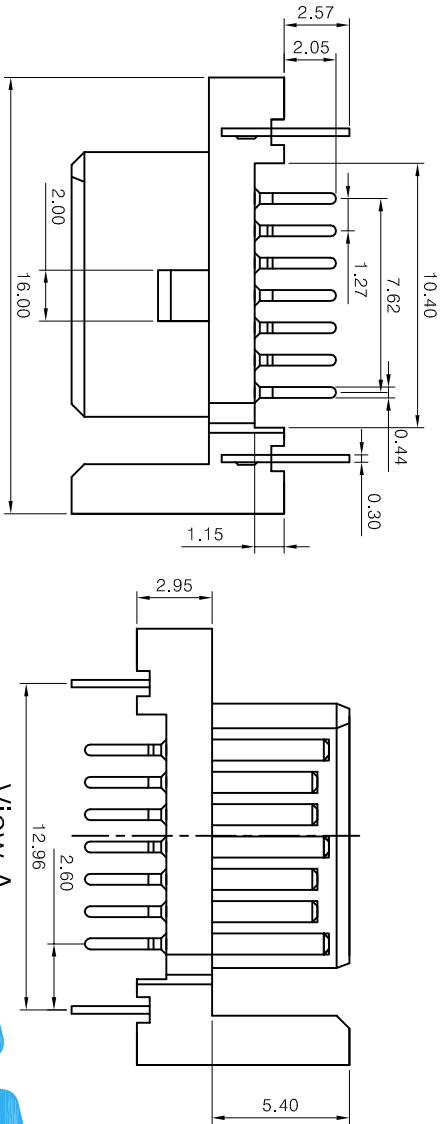


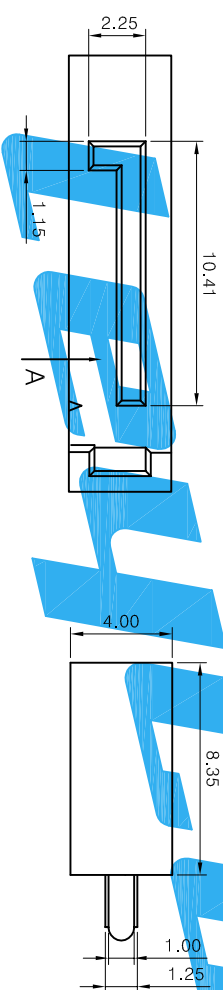

View A

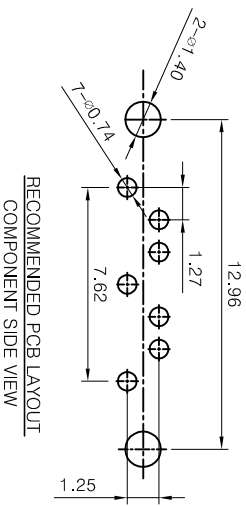

Specifications:

1. Material:
Insulator : LCP (black) UL94V-0
Terminal : Phosphor bronze or brass.
Peg : brass
2. Operating temperature : -55°C ~ +125°C
3. Rating current : 1.0A AC/DC
4. Contact resistance : < 20mΩ
5. Withstand voltage : 500V AC for one minute
6. Insulation resistance : > 100MΩ
7. Finish:
Terminal : Gold/ Tin plating on contact area
100u"min. Tin-Lead Plating on solder tails
50u"min. Nickel under plating over all
Peg : 100u"min. Tin-Lead Plating on solder tails
50u"min. Nickel under plating over all

Part Number:

471 07 1 1 1 X 1 0 X

Product Series: 471

Number of Contacts: 07 - 7PIN

Tail Style: 1 - Straight Solder

Locating peg option: 1 - with locating peg

Type of terminations: 1 - Type "A"

Insulator Code: 1 - Black

Plating Code : 1 - Selective gold flash over nickel
3 - Selective 0.075um gold over nickel
5 - Selective 0.125um gold over nickel
6 - Selective 0.25um gold over nickel
7 - Selective 0.375um gold over nickel
8 - Selective 0.75um gold over nickel

E		Units	mm	Scale	2:1	Drawing By	Date	<div><div>leyconn</div><div>LEYCONN ELECTRONICS CO.,LTD.</div><div>深圳市联益康电子有限公司</div><div>TEL: +86(755)26078616 FAX: 26070522</div></div>		<div><div>1 of 1</div><div>Title</div><div>SATA DIP A型 单定位柱</div></div>		<div><div>Part No.</div><div>4710711X10X</div></div> <div>REV</div> <div>A</div>	
D		Tolerance Unless				Reviewed By	Date						
C		Otherwise Specified				YP-Liang	2019/04/29						
B		.X ~ ±0.30				Approval By	Date						
A		.XXX ~ ±0.20				Kirby-Xiao	2019/04/29	Third Angle Projection					
REV		DESCRIPTION.		Date		Angle ~ ± 3°							
1		2		3		4		5		6		7	