




Specifications:

1. Material:
Insulator : LCP (black) UL94V-0
Terminal : Phosphor bronze or brass.
Peg : brass
2. Operating temperature : -55°C ~ +125°C
3. Rating current : 1.0A AC/DC
4. Contact resistance : < 20mΩ
5. Withstand voltage : 500V AC for one minute
6. Insulation resistance : > 100MΩ
7. Finish:
Terminal : Gold/Tin plating on contact area
100u"min. Tin-Lead Plating on solder tails
50u"min. Nickel under plating over all
Peg : 100u"min. Tin-Lead Plating on solder tails
50u"min. Nickel under plating over all

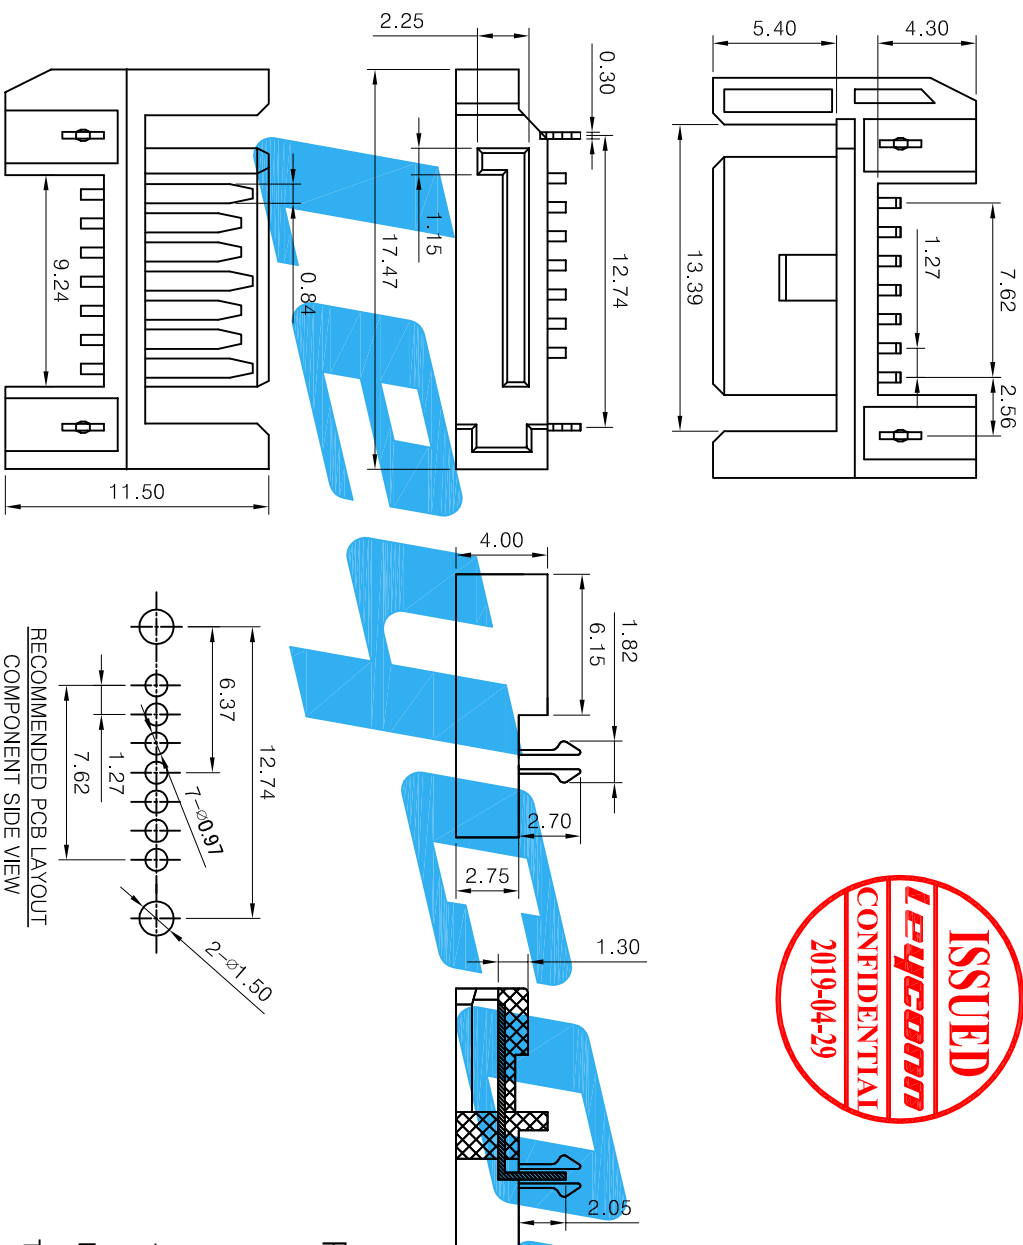

Part Number:

472 07 2 1 4 X 1 0 X

Product Series 472

Number of Contacts:- 472

07 -7PIN

Tail Style:

2-Right Angel Solder

Locating peg option:

1-with locating peg

Type of terminations:-

4 - Inverted

Insulator Code:

1-Black

Plating Code :

- 1-Selective gold flash over nickel
- 3-Selective 0.075um gold over nickel
- 5-Selective 0.125um gold over nickel
- 6-Selective 0.25um gold over nickel
- 7-Selective 0.375um gold over nickel
- 8-Selective 0.75um gold over nickel

leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com

Sheet 1 of 1

Third Angle Projection

Title SAT A Right angle solder, Inverted

Part No.

47207214X10X

REV A

6

7

8