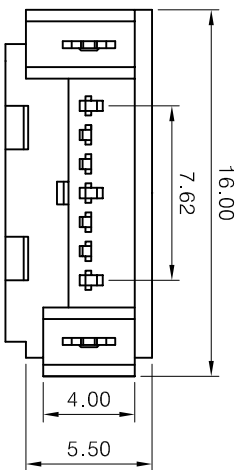
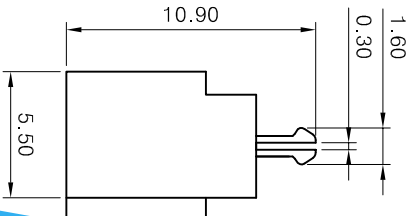
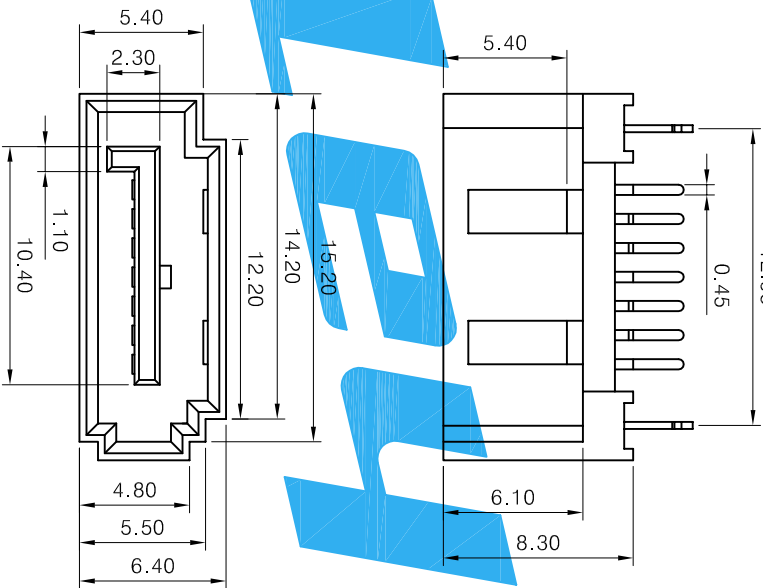
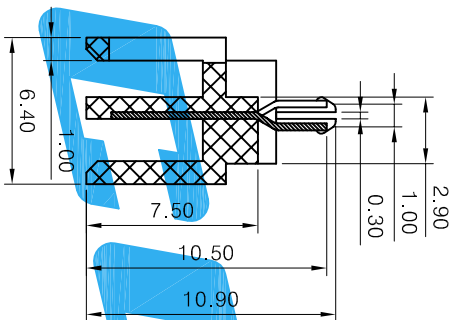


RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

Specifications:

1. Material:
Insulator : LCP (black) UL94V-0
Terminal : Phosphor bronze or brass.
Peg : brass
2. Operating temperature : -55°C ~ +125°C
3. Rating current : 1.0A AC/DC
4. Contact resistance : < 20mΩ
5. Withstand voltage : 500V AC for one minute
6. Insulation resistance : > 100MΩ
7. Finish:
Terminal : Gold/Tin plating on contact area
100u"min. Tin-Lead Plating on solder tails
50u"min. Nickel under plating over all
Peg : 100u"min. Tin-Lead Plating on solder tails
50u"min. Nickel under plating over all

Part Number:

473 07 1 1 5 X 1 0 X

Product Series :
473
Number of Contacts :
07 -7PIN

Tail Style :
1 -Straight Solder

Locating peg option :
1 -with locating peg

Type of terminations :
5 - Open Frame

Insulator Code:
1 -Black

Plating Code :
1 -Selective gold flash over nickel

- 3-Selective 0.075um gold over nickel
- 5-Selective 0.125um gold over nickel
- 6-Selective 0.25um gold over nickel
- 7-Selective 0.375um gold over nickel
- 8-Selective 0.75um gold over nickel



5 - Open Frame

leyconn

Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Units mm Scale 2:1
Tolerance Unless
Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

Drawing By Lin-Wu Date 2019/04/29
Revmed By YP-Liang Date 2019/04/29
Approval By Kirby-Xiao Date 2019/04/29

Sheet 1 of 1

Third Angle Projection

Title SATA DIP 全包开窗 A型



Part No.

47307115X10X

REV A

DESCRIPTION.

Date

2019/04/29

2019/04/29

2019/04/29

2019/04/29

2019/04/29