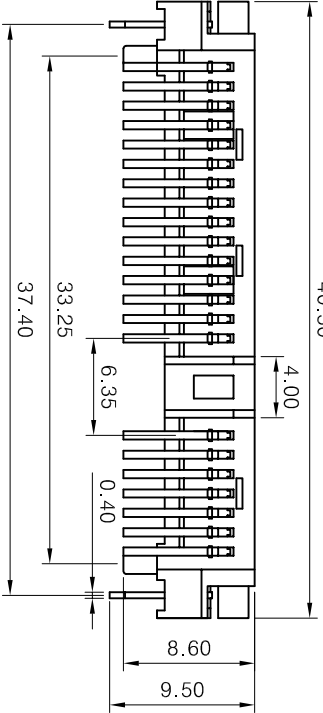
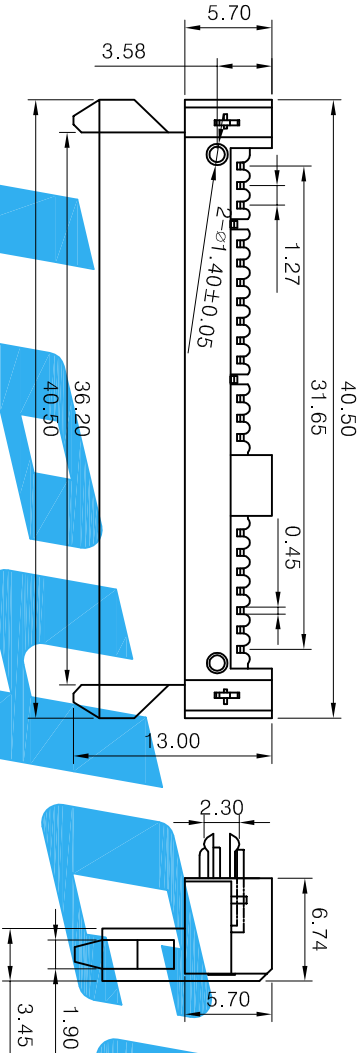


RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

Specifications:

1.Material:

Insulator : LCP (black) UL94V-0

Terminal : Phosphor bronze or brass.

Peg : brass

2.Operating temperature :-55°C ~ +125°C

3.Rating current : 1.0A AC/DC

4.Contact resistance : < 20mΩ

5.Withstand voltage : 500V AC for one minute

6.Insulation resistance : > 100MΩ

7.Finish:

Terminal : Gold/Tin plating on contact area

100u"min. Tin-Lead Plating on solder tails

50u"min. Nickel under plating over all

Peg : 100u"min. Tin-Lead Plating on solder tails

50u"min. Nickel under plating over all

Part Number:

470 22 2 1 3 X 1 6 X

Product Series

470

Number of Contacts:-

22 - 7+15 PIN

Tail Style:

2-Right Angel Solder

Locating peg option:

1-with locating peg

Type of terminations:

3 - Frontal

Insulator Code:

1-Black

Plating Code :

1-Selective gold flash over nickel


3-Selective 0.075um gold over nickel

5-Selective 0.125um gold over nickel

6-Selective 0.25um gold over nickel

7-Selective 0.375um gold over nickel

8-Selective 0.75um gold over nickel



leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Drawing By
Lin-Wu
Date
2019/04/29

Reviewed By
YP-Liang
Date
2019/04/29

Approval By
Kirby-Xiao
Date
2019/04/29

Sheet
1 of 1

Third Angle Projection

Title

SATA RA H6.74 板下



Part No.

47022213X16X

REV
A

Units	mm	Scale	2:1
Tolerance Unless			
Otherwise Specified			
.X	~ ±0.30		
.XX	~ ±0.25		
.XXX	~ ±0.20		
Angle	~ ± 3°		

E	
D	
C	
B	
A	RELEASED 29/04/19
REV	DESCRIPTION. Date

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---