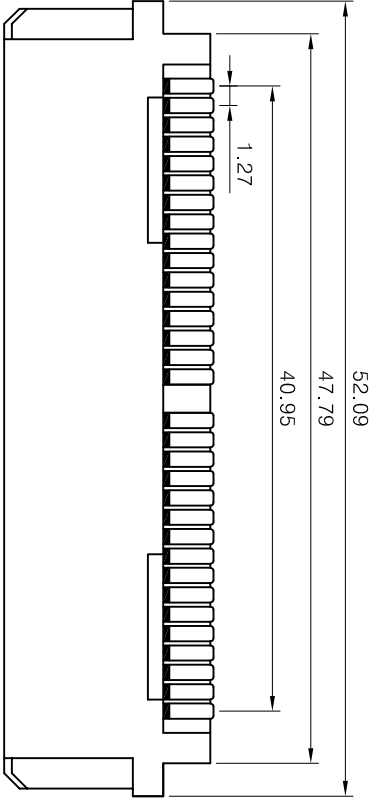
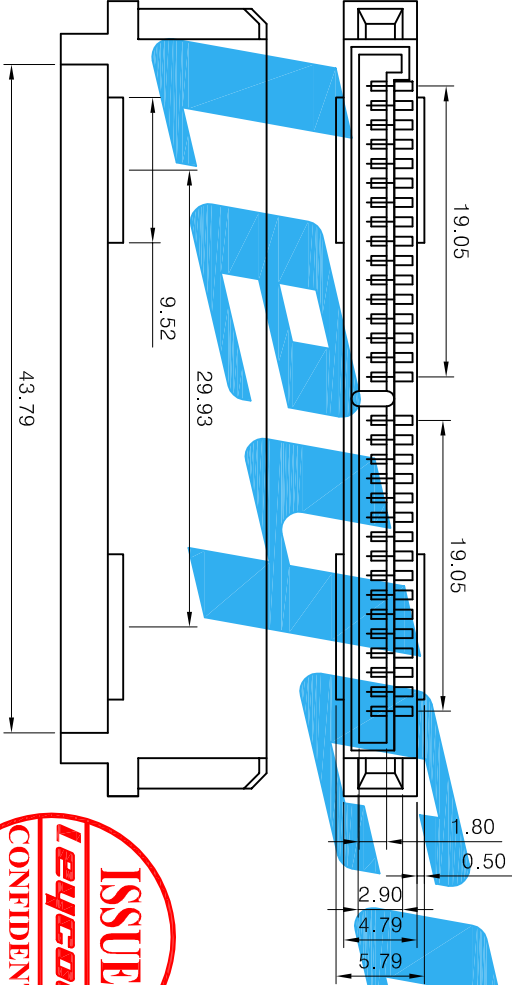


Specifications:

1.Material:

Insulator : LCP (black) UL94V-0

Terminal : Phosphor bronze or brass.

Peg : brass

2.Operating temperature : -55°C ~ +125°C

3.Rating current : 1.0A AC/DC

4.Contact resistance : < 20mΩ

5.Withstand voltage : 500V AC for one minute

6.Insulation resistance : > 100MΩ

7.Finish:

Terminal :Gold/Tin plating on contact area

100u"min. Tin-Lead Plating on solder tails

50u"min.Nickel under plating over all

Part Number:

470 32 5 0 0 X 1 0 X

Product Series

470

Number of Contacts:

32 - 16+16 PIN

Tail Style:

5-Wire bonding

Locating peg option:

0-without locating peg

Type of terminations:

0-Standard

Insulator Code:

1-Black

Plating Code :

1-Selective gold flash over nickel

3-Selective 0.075um gold over nickel

5-Selective 0.125um gold over nickel

6-Selective 0.25um gold over nickel

7-Selective 0.375um gold over nickel

8-Selective 0.75um gold over nickel



0-Standard

leyconn

Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet

1 of 1

Third Angle Projection

Title

SATA 16+16P 母座焊线式



Part No.

47032500X10X

REV A

DESCRIPTION.

Angle ~ ± 3°

Approval By

Kirby-Xiao

Date

2019/04/29

2019/04/29

2019/04/29

2019/04/29

2019/04/29

2019/04/29

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40