

Specifications:

- 1.Material:
Insulator : LCP (black) UL94V-0
Terminal : Phosphor bronze or brass.
Peg : brass
- 2.Operating temperature : -55°C ~ +125°C
3.Rating current : 1.0A AC/DC
4.Contact resistance : < 20mΩ
5.Withstand voltage : 500V AC for one minute
6. Insulation resistance : > 100MΩ
- 7.Finish:

Terminal :Gold/Tin plating on contact area
100u"min.Tin-Lead Plating on solder tails
50u"min.Nickel under plating over all

Part Number:

470 22 6 0 0 X 1 1 X

Product Series

470

Number of Contacts:-

22 = 7+15 PIN

Tail Style:

6-Without Polarizing Straddle

Locating peg option:

0-without locating peg

Type of terminations:-

0 - Standard

Insulator Code:

1-Black

Plating Code :

1-Selective gold flash over nickel


3-Selective 0.075um gold over nickel

5-Selective 0.125um gold over nickel

6-Selective 0.25um gold over nickel

7-Selective 0.375um gold over nickel

8-Selective 0.75um gold over nickel

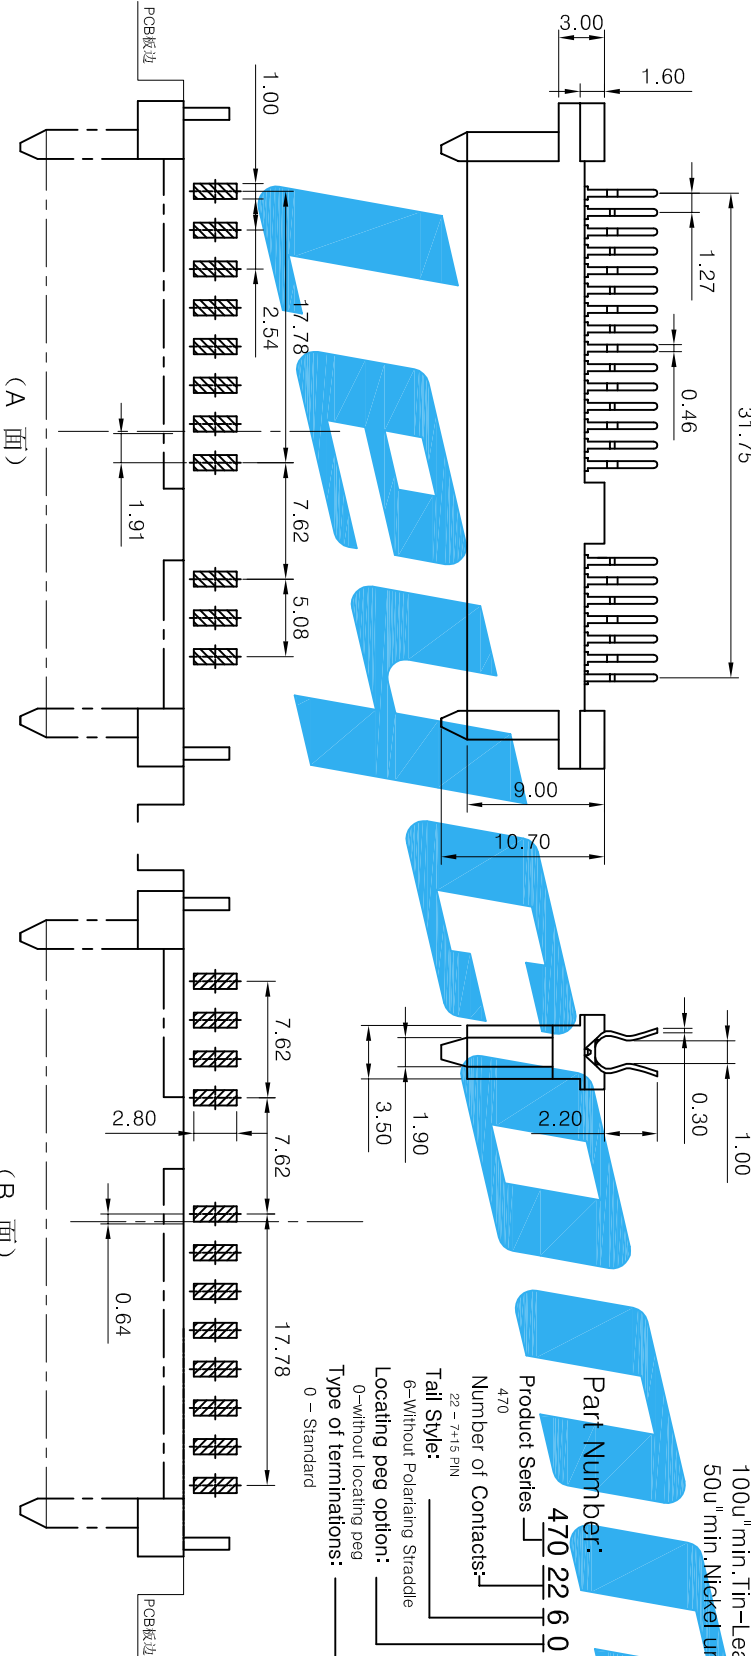

PCB LAYOUT

E		Units	mm	Scale	2:1	Drawing By	Date	Lin-Wu	2019/04/29	LEYCONN ELECTRONICS CO.,LTD.	深圳市联益康电子有限公司	TEL: +86(755)26078616	FAX: 26070522
D					Tolerance Unless	Reviewed By	Date	YP-Liang	2019/04/29	Http://www.leyconn.com			
C					Otherwise Specified								
B					.X ~ ±0.30								
A					.XX ~ ±0.25								
REV					.XXX ~ ±0.20	Approval By	Date	Kirby-Xiao	2019/04/29	Third Angle Projection	Part No.	47022600X11X	REV A