

Specifications:

1. Material:
Insulator : LCP (black) UL94V-0
Terminal : Phosphor bronze or brass.
Peg : brass
2. Operating temperature : -55°C ~ +125°C
3. Rating current : 1.0A AC/DC
4. Contact resistance : < 20mΩ
5. Withstand voltage : 500V AC for one minute
6. Insulation resistance : > 100MΩ
7. Finish:


Terminal :Gold/Tin plating on contact area
100u"min, Tin-lead Plating on solder tails
50u"min, Nickel under plating over all

Part Number:

470 22 6 0 0 X 1 2 X

Product Series : 470
Number of Contacts: 22 - 7+15 PIN
Insulator Code: 1-Black
Plating Code : 1-Selective gold flash over nickel
3-Selective 0.075um gold over nickel
5-Selective 0.125um gold over nickel
6-Selective 0.25um gold over nickel
7-Selective 0.375um gold over nickel
8-Selective 0.75um gold over nickel
0 - Standard

Tail Style: 22 - 7+15 PIN
6-Without Polishing Straddle
Locating peg option:
0-without locating peg
Type of terminations:

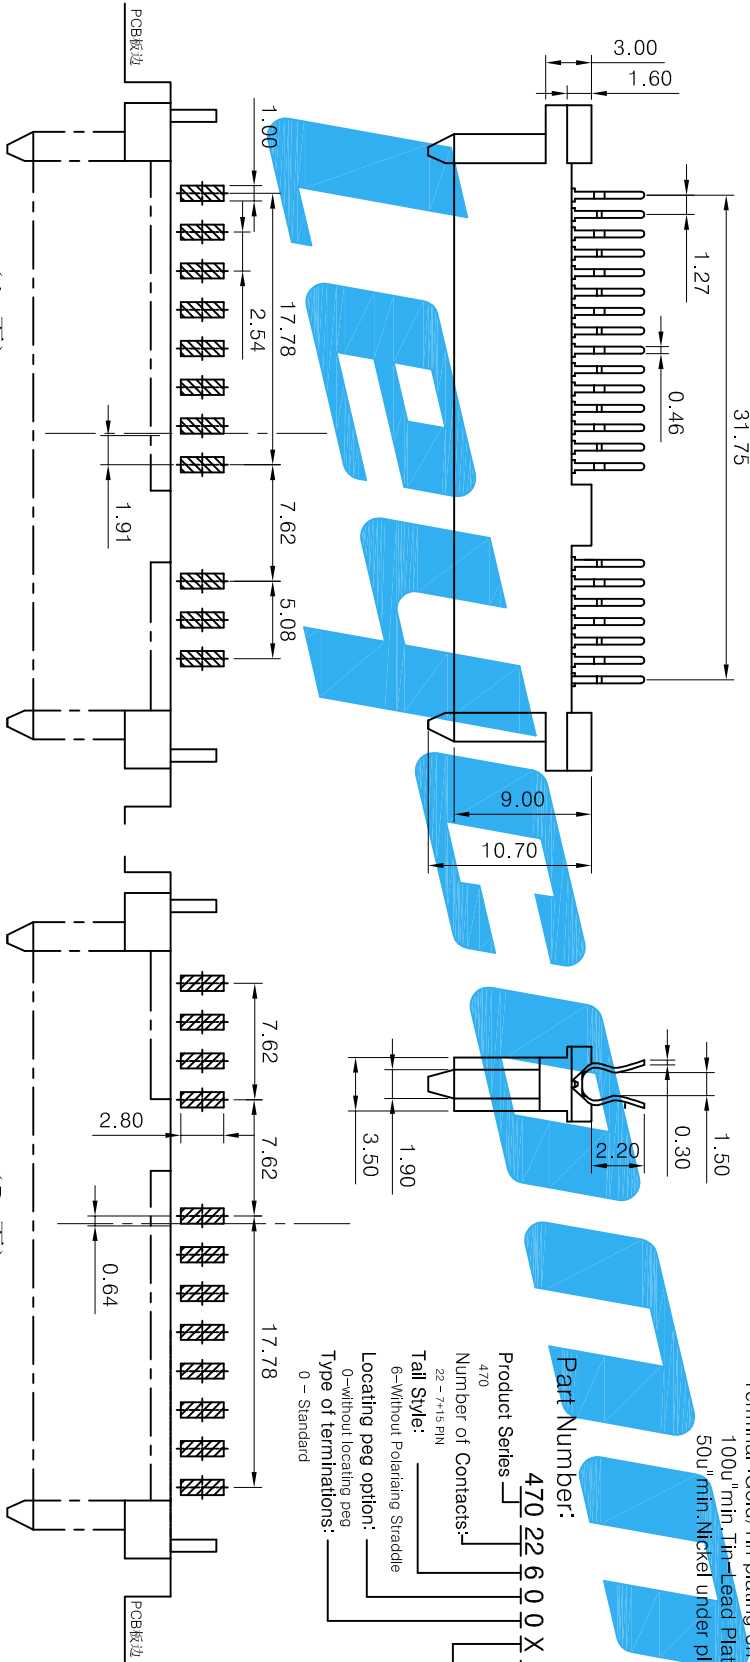

PCB LAYOUT

(B 面)

E		Units	mm	Scale	2:1	Drawing By	Date	lin-wu	2019/04/29	leyconn		LEYCONN ELECTRONICS CO.,LTD.
D		Tolerance Unless		Otherwise Specified		Reviewed By	Date	YP-Liang	2019/04/29	Http://www.leyconn.com		深圳市联益康电子有限公司
C		.X ~ ±0.30				Approval By	Date	Kirby-Xiao	2019/04/29	Third Angle Projection		夹板1.5 不带鱼叉
B		.XX ~ ±0.25								Part No.		47022600X12X
A		.XXX ~ ±0.20								REV		A
REV		DESCRIPTION.		Date		Angle ~ ± 3°						