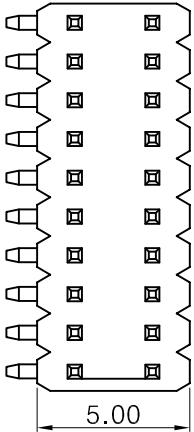
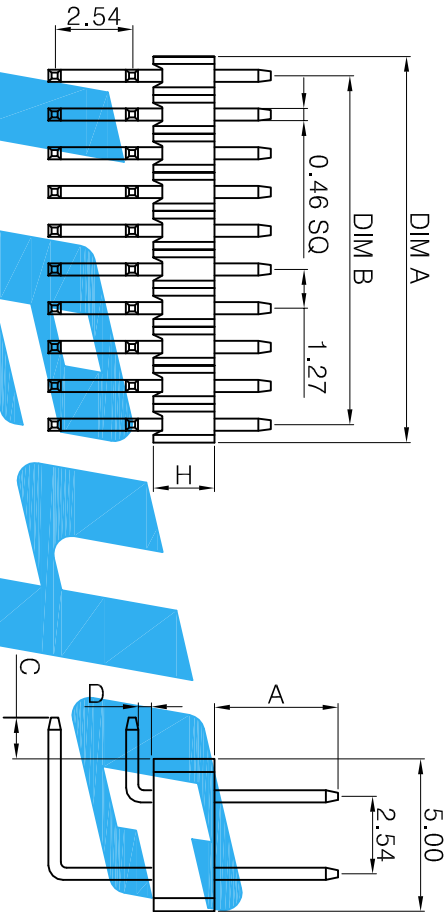


SPECIFICATIONS
Current Rating: 1A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 300V AC/minute
Operation Temperature: -40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester (UL94V-0)
SQ PIN : RA: 0.46X(A+H+D+C+1.25)

Dim	P/位	(1-49)	50
Dim A	1.27*N-0.20	63.5	
Dim B	1.27*(N-1)		

Part Number:

34 2 NN X X 2 XXX X

Pitch(Unit:mm): 4-1.27*2.54
Number of Row: 2-Double Row
Pin number of each row: 01 ~ 50 PIN
Insulator Material: 2-LCP 4-PA46 5-P-PA6T 9-P-PA9T
Contact Plated: 0-Tin over nickel 1-Gold flash over nickel 2-0.05um gold over nickel 3-0.075um gold over nickel, 5-0.125um gold over nickel 6-0.25um gold over nickel, 7-0.375um gold over nickel 8-0.75um gold over nickel A-0.02um gold over nickel B-0.01um gold over nickel
Serial number: Determined by the LEYCONN
Pin Length: XXX~A+D+(W-1.27)/2-0.40
Tail & Mounting Style: 2-Right Angle

leyconn LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Title 1.27mm PIN Header Double Row
Third Angle Projection
Part No. 342NNXX2XXXX

1	2	3	4	5	6	7	8
E			Units mm	Scale 5:1	Drawing By Hui-Wen	Date 2019/02/26	
D			Tolerance Unless	Otherwise Specified	Reviewed By Nick-Yin	Date 2019/02/26	
C							
B							
A							
REV							
1	2	3	4	5	6	7	8