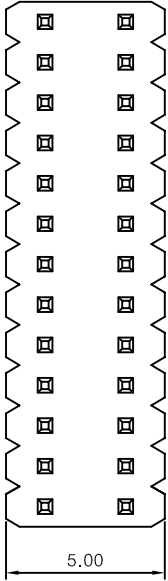
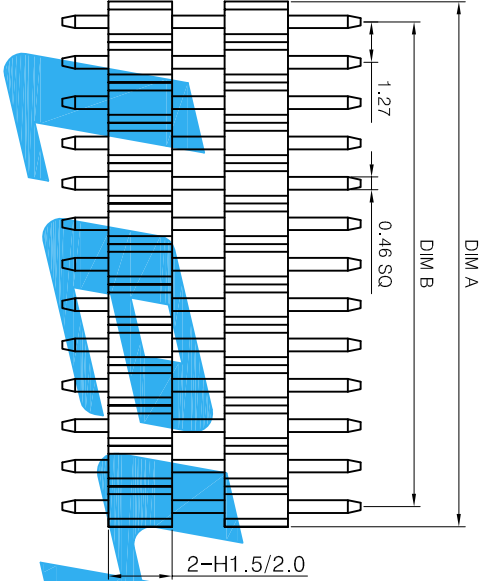


SPECIFICATIONS
Current Rating: 1A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 300V AC/minute
Operation Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester (UL94V-0)
SQ PIN : 0.46 X (A+B+C)mm

Dim	P位	(1-49)	50
Dim A	1.27 * N-0.20	63.5	
Dim B	1.27 * (N-1)		

N=No. of contacts / per row

Part Number:

34 2 NN X X 1 XXX X

Pitch(Unit:mm): 4-1.27*2.54
Number of Row: 2-Double Row
Pin number of each row: 01 ~ 50 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 2-0.05um gold over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel
Serial number: Determined by the LEYCONN
Pin Length: XXX~A+B+C
Tail & Mounting Style: 1-Straight solder



leyconn LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1 Title 1.27*2.54mm PIN Header, Double Row, Straight
Third Angle Projection Part No. 342NNXX1XXXX REV A

Units	mm	Scale	5:1
Tolerance Unless			
Otherwise Specified			
.X	~ ±0.30		
.XX	~ ±0.25		
.XXX	~ ±0.20		
Angle	~ ± 3°		

Drawing By	Date
Hui-Wen	2019/02/26
Reviewed By	Date
Nick-Yin	2019/02/26
Approval By	Date
Kirby-Xiao	2019/02/26

E	Units	mm	Scale	5:1
D				
C				
B				
A	RELEASED	26/02/19		
REV	DESCRIPTION.	Date		

1	2	3	4	5	6	7	8
1	2	3	4	5	6	7	8