

Dim	P 位	(1-49)	50
Dim A	1.27*(N-0.20)	63.5	
Dim B	1.27*(N-1)		


SPECIFICATIONS
Current Rating: 1A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:300V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating:Au or Sn over 50μ"Ni
Insulator Material:Polyester(UL94V-0)
SQ PIN : 0.40XA+B+D+(W-1.27)/2-0.40mm

N=No. of contacts / per row



Part Number:

33 2 NN X X 3 XXX X

Pitch(Unit:mm): 1.27
Number of Row: 2-Double Row
Pin number of each row: 01 ~ 50 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 2-0.05um gold over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel B-0.01um gold over nickel
Serial number: Determined by the LEYCONN
Pin Length: XXX~A+D+(W-1.27)/2-0.40
Tail & Mounting Style: 3-Surface mount perpendicular



RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

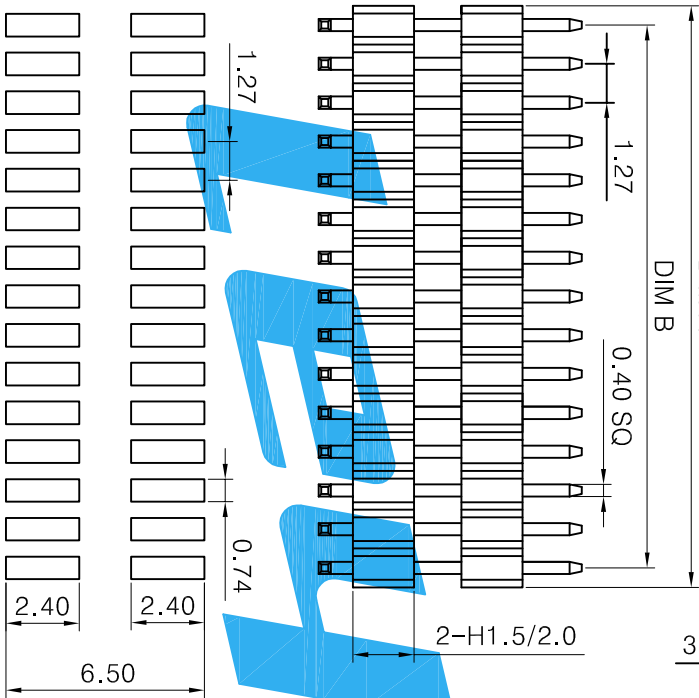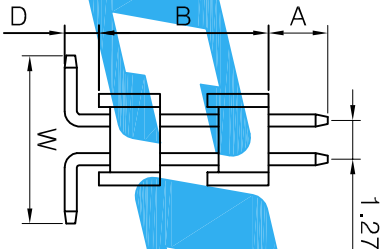

E	Units	mm	Scale	4:1	Drawing By	Date
D	Tolerance Unless	Otherwise Specified			Hui-Wen	2019/02/26
C					Reviewed By	Date
B					Nick-Yin	2019/02/26
A	RELEASED	26/02/19	.XX	~ ±0.30	Approval By	Date
REV	DESCRIPTION.	Date	.XXX	~ ±0.20	Kirby-Xiao	2019/02/26
1	2	3	4	5	6	7

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 260705222

Http://www.leyconn.com
Sheet 1 of 1
Title 1.27mm PIN Header Double Row,
Board Spacer S.M.T Type
Part No. 332NNXX3XXXX
REV A