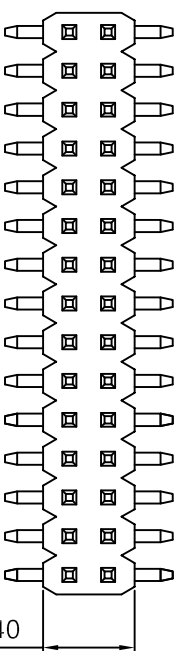
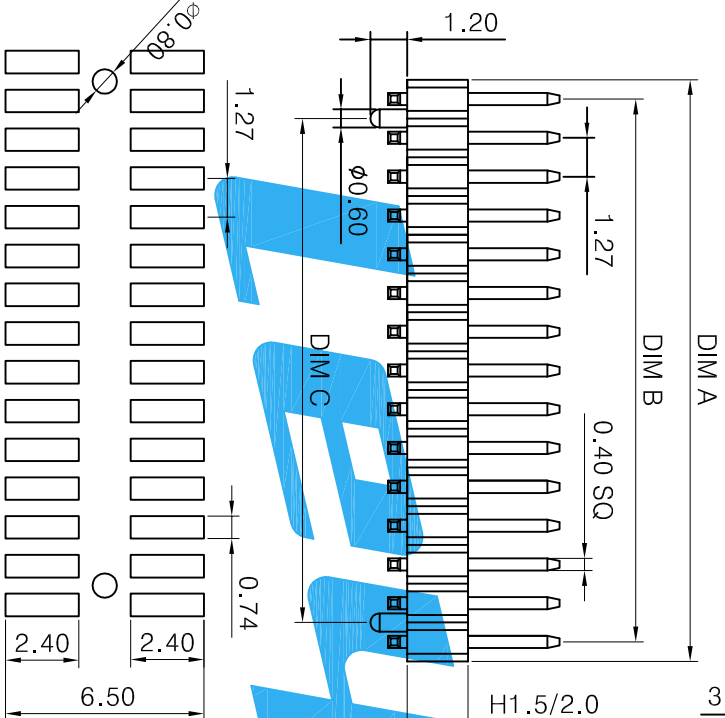


$P^{\text{位}}$ \ Dim	(1-49)	50
Dim A	1.27 * N - 0.20	63.5
Dim B	1.27 * (N - 1)	
Dim C	1.27 * (N - 2)	

SPECIFICATIONS
Current Rating: 1A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 300V AC/minute
Operation Temperature: -40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)
SQ PIN : 0.40XD+A+(W-1.27)/2-0.40mm

N=No. of contacts / per row

Part Number:

33 2 NN X X 3 XXX X

Pitch (Unit:mm):

Number of Row:

Pin number of each row:

Insulator Material:

Contact Plated:

Serial number:

Pin Length:

Tail & Mounting Style:



RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

E				Units	mm	Scale	4:1	Drawing By	Date	<div> LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522 Http://www.leyconn.com</div>					
D				Tolerance Unless Otherwise Specified				Hui-Wen	2019/02/26						
C								Revised By	Date						
F	B			.X ~ ±0.30				Nick-Yin	2019/02/26						
				.XX ~ ±0.25				Approval By	Date						
	A		RELEASED	26/02/19	.XXX ~ ±0.20				Kirby-Xiao	2019/02/26					
REV		DESCRIPTION.	Date	Angle ~ ± 3°											
1		2		3		4		5		6		7		8	