
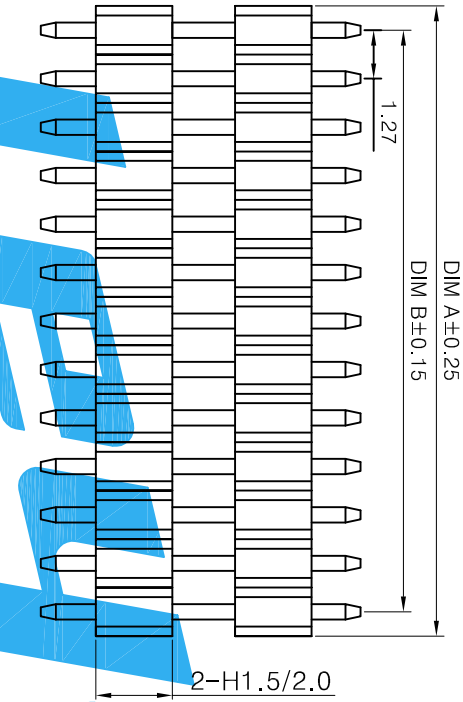


N=No. of contacts / per row		
Dim	P _{1/2}	(1-49)
Dim A	1.27*N-0.20	63.5
Dim B	1.27*(N-1)	

SPECIFICATIONS
Current Rating: 1A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:300V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)
SQ PIN : 0.46/0.40 X (A+B+C)mm

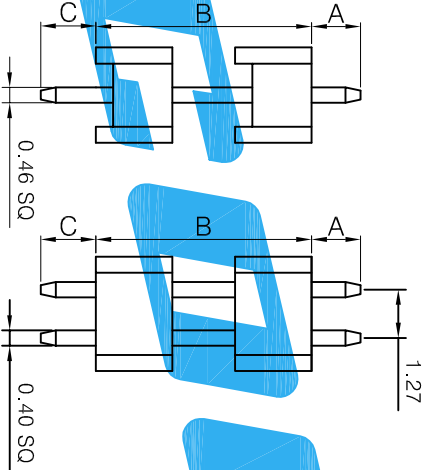

Part Number:

33 X NN X X 1 XXX X

Pitch(Unit:mm):

3-1.27

Number of Row:

1-Single row 2-Double Row

Pin number of each row:

01 ~ 50 PIN

Insulator Material:

2-LCP 4-PA46

5-PA6T 9-PA9T

Contact Plated:

0-Tin over nickel ,1-Gold flash over nickel

2-0.05um gold over nickel 3-0.075um gold over nickel,

5-0.125um gold over nickel 6-0.25um gold over nickel,

7-0.375um gold over nickel 8-0.75um gold over nickel,

A-0.02um gold over nickel B-0.01um gold over nickel

Serial number:

Determined by the LEYCONN


Pin Length:

XXX-A+B+C

Tail & Mounting Style:


1-Straight solder

RECOMMENDED PCB LAYOUT

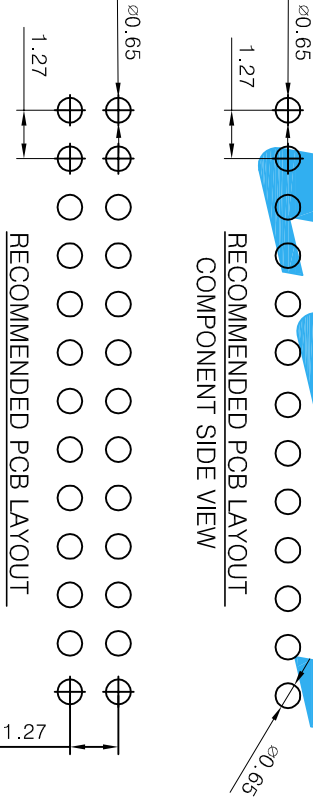

RECOMMENDED PCB LAYOUT

COMPONENT SIDE VIEW



leyconn

Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司

TEL: +86(755)26078616 FAX: 26070522

Sheet

1 of 1

Title

Single Row/Double Row Straight

Part No.

33XNNXX1XXXX

REV

A

Units mm Scale 5:1

Tolerance Unless

Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Drawing By

Hui-Wen

Date

2019/02/26

Reviewed By

Nick-Yin

Date

2019/02/26

Approval By

Kirby-Xiao

Date

2019/02/26

Third Angle Projection

Part No.

33XNNXX1XXXX

REV

A