


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS



N=No. of contacts / per row

Dim	P位 (1-49)	50
Dim A	1.27*N-0.20	63.5
Dim B	1.27*(N-1)	

SPECIFICATIONS

Current Rating: 1A

Contact Resistance:20mΩ Max

Insulation Resistance:1000MΩ Min

Withstand Voltage:300V AC/minute

Operation Temperature:-40℃ to +105℃

Contact Material: Brass

Contact Plating: Au or Sn over 50μ"Ni

Insulator Material: Polyester(UL94V-0)

SQ PIN : 0.46X(A+B+C)mm



Part Number:

33 1 NN X X 1 XXX X

Pitch(Unit:mm): 1.27

Number of Row: 1

1-Single row

Pin number of each row: 01 ~ 50 PIN




Insulator Material: 2-PCP 4-PA46 5-PA6T 9-PA9T

Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 2-0.05um gold over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel.

Serial number: Determined by the LEYCONN

Pin Length: XXX-A+B+C

Tail & Mounting Style: 1-Straight solder

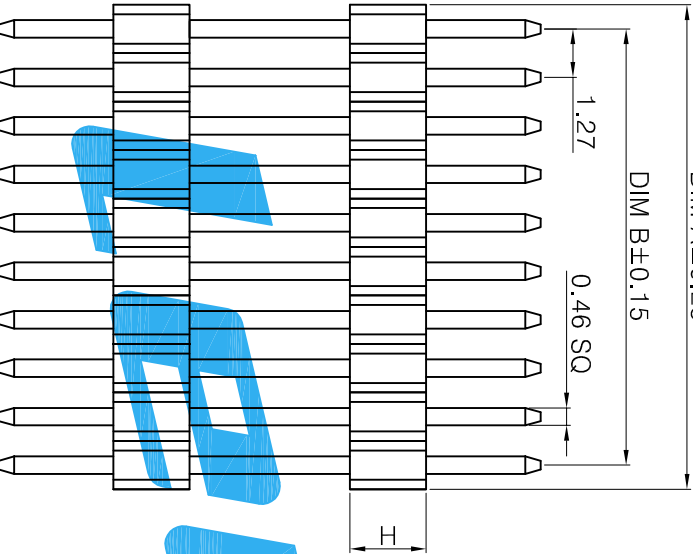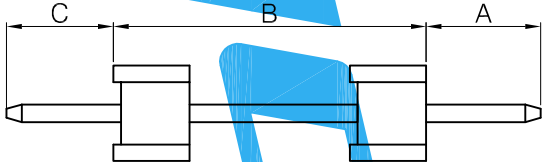

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

E	Units	mm	Scale	5:1	Drawing By	Date	2019/02/26
D	Tolerance Unless	Otherwise Specified			Hui-Wen		
C					Reviewed By	Date	2019/02/26
B					Nick-Yin		
A	RELEASED	26/02/19			Approval By	Date	2019/02/26
REV	DESCRIPTION.	Date	Angle	~ ± 3°	Kirby-Xiao		

leyconn

Http://www.leyconn.com

Sheet 1 of 1

Third Angle Projection

Part No.

331NNXX1XXXX

LEYCONN ELECTRONICS CO.,LTD.

深圳市联益康电子有限公司

TEL: +86(755)26078616 FAX: 26070522

1.27mm,0.46SQ Board Spacer,

Single Row, Straight

REV A