


N=No. of contacts / per row		
Dim	P位 (1~49)	50
Dim A	1.27*N-0.20	63.5
Dim B	1.27*(N-1)	

SPECIFICATIONS


Current Rating : 1A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:300V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating:Au or Sn over 50μ"Ni
Insulator Material:Polyester(UL94V-0)
SQ PIN : 0.46/0.40 X (A+H+C)mm

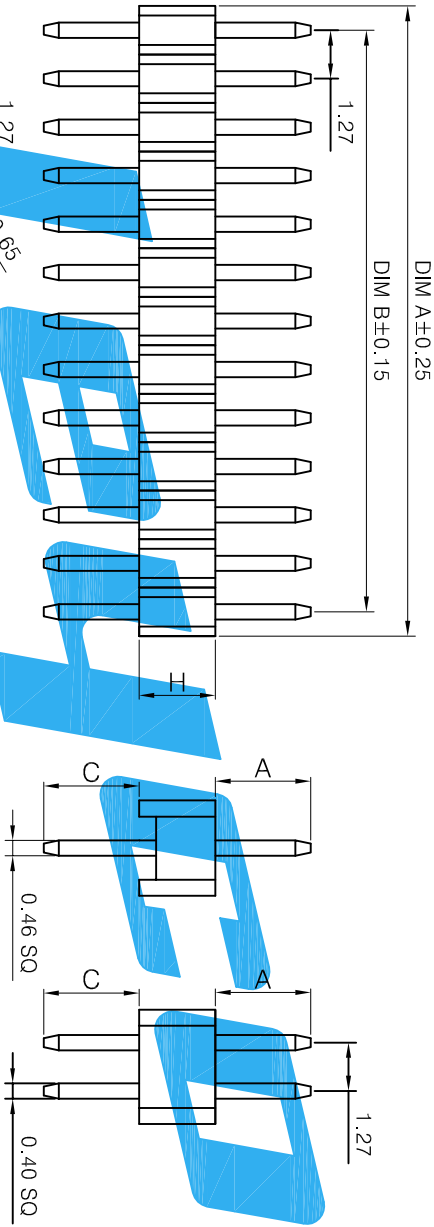

Part Number:

33 X NN X X 1 XXX X

Pitch(Unit:mm): 3-1.27
Number of Row: 1-Single row 2-Double Row
Pin number of each row: 01 ~ 50 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Contact Plated: 0-Tin over nickel 1-Gold flash over nickel 2-0.05um gold over nickel 3-0.075um gold over nickel, 5-0.125um gold over nickel 6-0.25um gold over nickel, 7-0.375um gold over nickel 8-0.75um gold over nickel, A-0.02um gold over nickel
Tail & Mounting Style: 1-Straight solder
Serial number: Determined by the LEYCONN
Pin Length: XXX-A+H+C

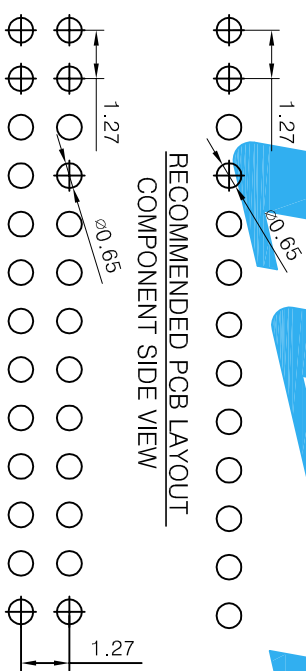

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

E		Units	mm	Scale	5:1
D		Tolerance Unless Otherwise Specified			
C		.X ~ ±0.30			
B		.XX ~ ±0.25			
A	RELEASED	26/02/19			
REV	DESCRIPTION.	Date			
1	2	3			
				4	5
				6	7
				8	

Drawing By	Date	<div><div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div>leyconn</div><div>LEYCONN ELECTRONICS CO.,LTD.</div><div>深圳市联益康电子有限公司</div></div>				
Hui-Wen	2019/02/26	Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522				
Reviewed By	Date	Sheet	1 of 1	Title	1.27mm, Pin Header, Single/Dual Row, Straight	
Nick-Yin	2019/02/26	Third Angle Projection ⊕ ▢		Part No.	33XNNXX1XXXX	REV
Approval By	Date					
Kirby-Xiao	2019/02/26					

leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com

Third Angle Projection

REV A