
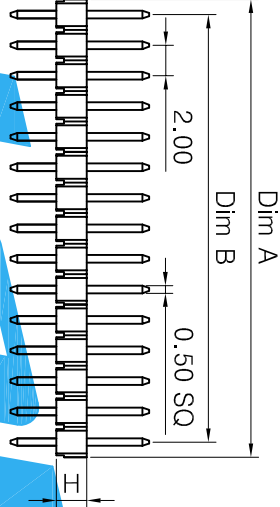




N=No. of contacts / per row

Dim	P位	(1-39)	40
Dim A	2.0*N-0.20	80.0	
Dim B	2.0*(N-1)		

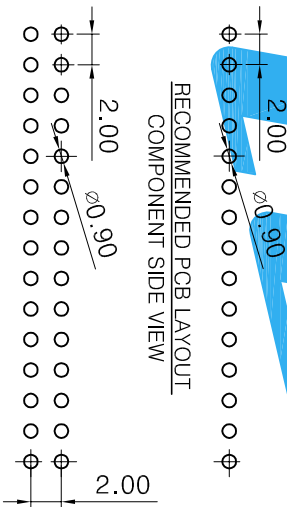

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



SPECIFICATIONS

Current Rating: 2A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 500V AC/minute
Operation Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester (UL94V-0)

Part Number:

32X NN X X 1 XXX X

Number of Row: _____
1-Single Row 2-Double Row
Pin number of each row: _____
01 ~ 40 PIN
Insulator Material: _____
2-LCP 4-PA46
5-PA6T 9-PA9T
Serial number: _____
Determined by the LEYCONN
PIN Length: _____
XXX-A+HC
Tail & Mounting Style: _____
1-Straight solder
Contact Plated: _____
0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel
A-0.02um gold over nickel
B-0.01um gold over nickel
2-0.05um gold over nickel



LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

E		Units	mm	Scale	2:1	Drawing By	Date	2019/02/26	Sheet	1 of 1	Title	2.00mm PIN Header, Single/Double Row, Straight	REV	A
D		Tolerance Unless	Otherwise Specified			Reviewed By	Date	2019/02/26						
C						YP-Liang	2019/02/26							
B														
A														
REV														

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---