


N=No. of contacts / per row		
Dim	Pitch	
Dim A	(1-39)	40
Dim B	2.0*N-0.20	80.0
Dim B	2.0*(N-1)	


SPECIFICATIONS

Current Rating: 2A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)

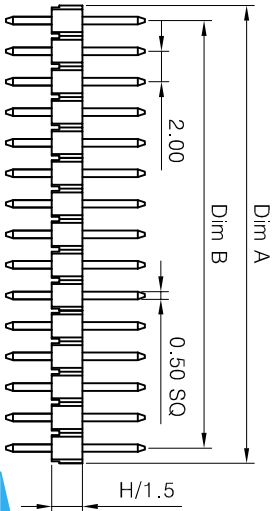


Part Number:


32X NN X X 1 XXX X



RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

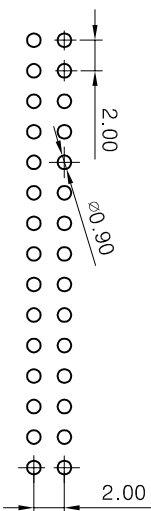

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com

2.00mm PIN Header Single/Daul Row,Straight

Sheet 1 of 1

Title

Third Angle Projection

Part No. 32XNNXX1XXXX

REV A

REV A

Units mm Scale 2:1

Drawing By Date 2019/02/26

Lin-Wu

Reviewed By Date 2019/02/26

YP-Liang

Approval By Date 2019/02/26

Kirby-Xiao

Angle ~ ± 3°

DESCRIPTION.

1

2

3

4

5

6

7

8