
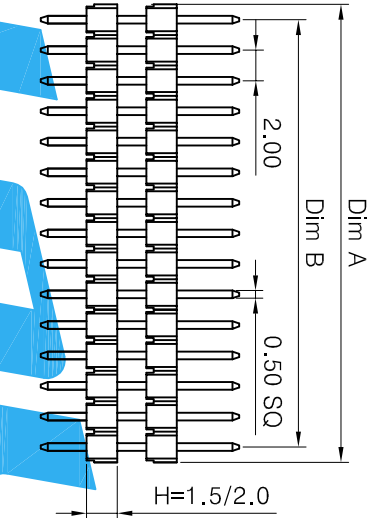


N=No. of contacts / per row

Dim	Pitch	(1-39)	40
Dim A		2.0*(N-0.20)	80.0
Dim B		2.0*(N-1)	

SPECIFICATIONS



Current Rating: 2A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)

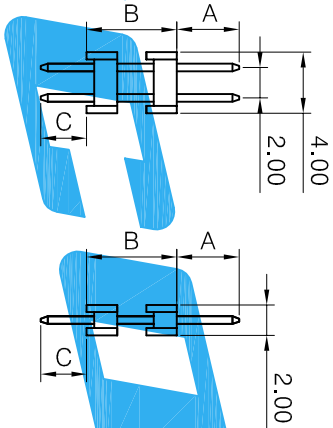

Part Number:

32X NN X X 1 XXX X

Number of Row: _____
1-Single Row 2-Double Row
Pin number of each row: _____
01 ~ 40 PIN
Insulator Material: _____
2-LCP 4-PA46
5-PA6T 9-PA9T
Serial number:
Determined by the LEYCONN
PIN Length:
XXX-A-B+C
Tail & Mounting Style:
1-Straight solder
Contact Plated:
0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel
A-0.02um gold over nickel
B-0.01um gold over nickel
2-0.05um gold over nickel

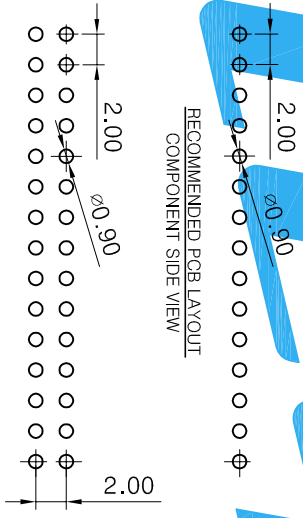

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

LEYCONN
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Title 2.00mm PIN Header, Single/Double Row,
Straight, Two Tiers
Part No. 32XNNXX1XXXX

REV A