




SPECIFICATIONS

Current Rating: 2A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 500V AC/minute
Operation Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn over 40μ" Ni
Insulator Material: Polyester (UL94V-0)







N=No. of contacts / per row	
Dim B	(1-39)
Dim A	2.00*(N-0.20)
Dim B	2.00*(N-1)


Part Number

32 X NN X X 2 XXX X


Number of Row: 1 - Single Row
2 - Double Row
3 - Tree Row
Pin number of each row: 01 ~ 40 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Serial number: Determined by the LEYCONN
PIN Length: XXX-A+HH-D+C+1.0
Tail & Mounting Style: 2-Right Angle
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel

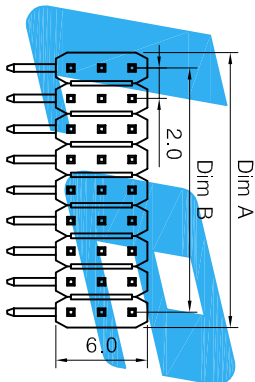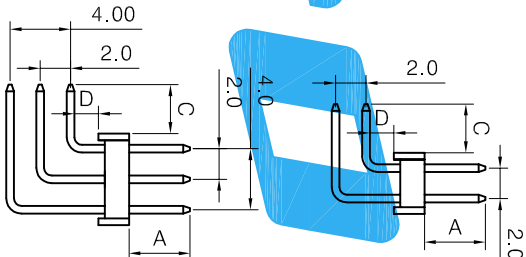

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

ISSUED

LEYCONN

CONFIDENTIAL

2019-02-27

RELEASED

27/02/19

XXX ~ ±0.20

Angle ~ ± 3°

DESCRIPTION.

REV

1

2

3

4

5

6

7

8

LEYCONN

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com

Sheet 1 of 1

Third Angle Projection

Title 2.00mm PIN Header Single/Double/Third Row

Right Angle Type

Part No. 32XNNXX2XXXX

REV A