
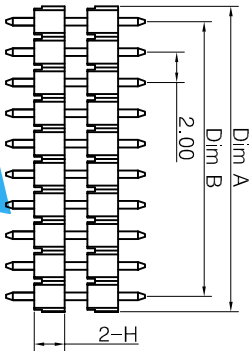






N=No. of contacts / per row		
Dim	P位	(1-39)
Dim A	2.0*N-0.20	80.0
Dim B	2.0*(N-1)	

SPECIFICATIONS

Current Rating: 2A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)

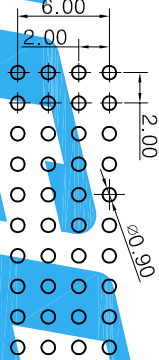

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

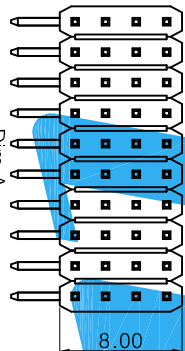

Part Number:

32 4 NN X X X XXX X

Number of Row: 32
4-Four Row
Pin number of each row: 4
Insulator Material: 01 ~ 40 PIN
2-LCP 4-PA46
5-PA6T 9-PA9T
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel, 2-0.05um gold over nickel
Serial number: Determined by the LEYCONN
PIN Length: (DIP半塑)XXX-A+H+C (DIP双塑)XXX-A+B+C (RA半塑)XXX-A+H+C+D+1.0
Tail & Mounting Style: 1-Straight solder 2-Right angle solder

0-Tin over nickel,
1-Gold flash over nickel
3-0.075um gold over nickel,
5-0.125um gold over nickel,
6-0.25um gold over nickel,
7-0.375um gold over nickel,
8-0.75um gold over nickel,
A-0.02um gold over nickel,
B-0.01um gold over nickel
2-0.05um gold over nickel



LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Units		Scale		Drawing By		Date	
E		mm	2:1	Lin-Wu		2019/02/26	
D		Tolerance Unless		Reviewed By	Date		
C		Otherwise Specified		YP-Liang	2019/02/26		
B		.X ~ ±0.30		Approval By	Date		
A		.XXX ~ ±0.25		Kirby-Xiao	2019/02/26		
REV		Angle ~ ± 3°					
DESCRIPTION.				Third Angle Projection		Part No.	324NNXXXXXX
1		2		3		4	
5		6		7		8	