
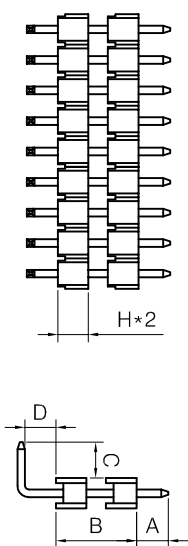


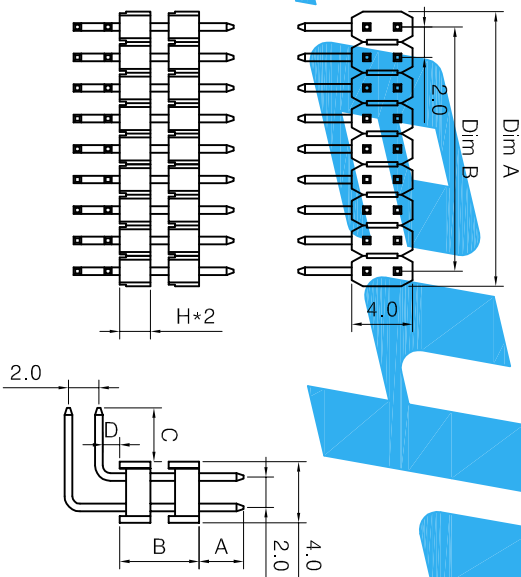


N-No. of contacts / per row

Pin#	(1-39)	40
Dim A	2.00*N-0.20	80
Dim B	2.00*(N-1)	



SPECIFICATIONS

Current Rating: 2A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 40μ"Ni
Insulator Material: Polyester (UL94V-0)

Part Number

3 2 X NN X X 2 XXX X

Pitch(Unit:mm): 2-2.00
Number of Row: 1-Single row 2-Double row
Pin number of each row: 01 ~ 40 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Tail & Mounting Style: 2-Right Angle
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel

Serial number: Determined by the LEYCONN
PIN Length: XXX-A+B+C+D+1.0

Pin number of each row: 01 ~ 40 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T

Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T

ISSUED

LEYCONN
CONFIDENTIAL

2019-02-26

Units	mm	Scale	2:1
Tolerance Unless			
Otherwise Specified			

Drawing By	Date
Lin-Wu	2019/02/26
Reviewed By	Date
YP-Liang	2019/02/26
Approval By	Date
Kirby-Xiao	2019/02/26

Sheet	1 of 1
Http://www.leyconn.com	

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

REV A