

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



SPECIFICATIONS
Current Rating: 3A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 600V AC/minute
Operation Temperature: -55°C to +125°C
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)

N=No. of contacts / per row			
Dim P位	(1-39)	40	
Dim A	2.0 * N-0.20	80.0	
Dim B	2.0 * (N-1)		
Dim C	2.0 * (N-2)		

Part Number:

32 2 NN X X X XXX X

Pitch(Unit:mm): 2-2.00
Number of Row: 2-Double row
Pin number of each row: 0-40 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Serial number: Determined by the LEYCONN
PIN Length: XXX-A+B+D+(W-2.0)/2
Tail & Mounting Style: 3-Surface mount 7-Surface mount + With Peg
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel 2-0.05um gold over nickel

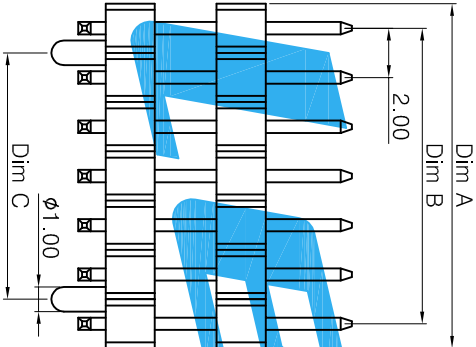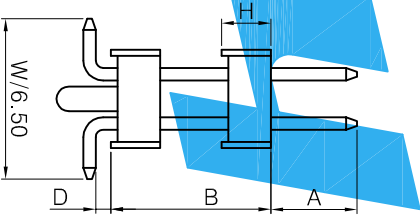

(帶定位柱)

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

ISSUED

LEYCONN
CONFIDENTIAL
2019-02-27

RELEASED
27/02/19

DESCRIPTION.







LEYCONN
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Third Angle Projection

Title 2.00mm Pin Header, Double Row, Surface mount.
Part No. 322NNXXXXXX

REV A

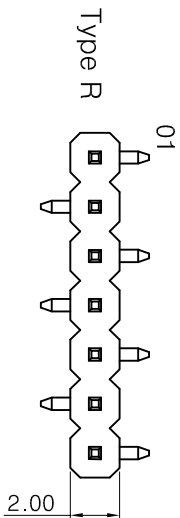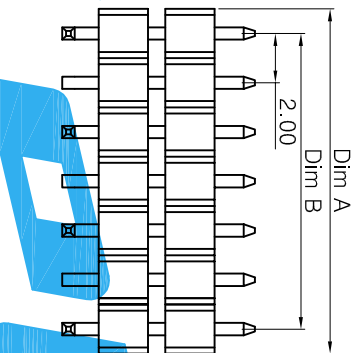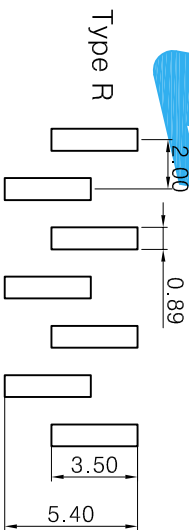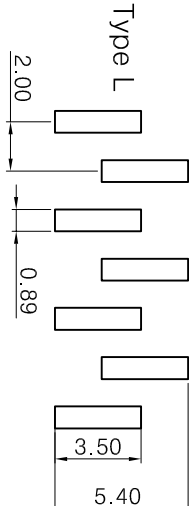

PCB LAYOUT

PCB LAYOUT

SPECIFICATIONS

Current Rating: 3A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 600V AC/minute
Operation Temperature: -55℃ to +125℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester (UL94V-0)

N=No. of contacts / per row

Dim	P位 (1-39)	40
Dim A	2.0 * N - 0.20	80.0
Dim B	2.0 * (N - 1)	

Part Number:

32 1 NN X X X XXX X
Pitch (Unit:mm): 2-2.00
Number of Row: 1-Single row
Pin number of each row:- 0-40 PIN
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel, 2 -0.05um gold over nickel
Tail & Mounting Style: R-Surface mount (右前左后) L-Surface mount (左前右后)
PIN Length: XXX-A+B+D+W/2
Serial number: Determined by the LEYCONN
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel, 2 -0.05um gold over nickel

leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com

2.00mm Pin Header, Single Row, Surface mount.

E		Units	mm	Scale	3:1	Drawing By	Lin-Wu	Date	2019/02/27
D		Tolerance Unless			Otherwise Specified	Reviewed By	YP-Liang	Date	2019/02/27
C		.X ~ ±0.30				Approval By	Kirby-Xiao	Date	2019/02/27
B		.XX ~ ±0.25				Third Angle Projection			
A		.XXX ~ ±0.20				Part No.	321NNXXXXXX	REV	A
REV		DESCRIPTION.			Date	Angle	~ ± 3°		

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---