


A-A
2:1



SPECIFICATIONS

Current Rating: 3A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 600V AC/minute
Operation Temperature: -40℃ to +105℃
Contact Material: Brass
Contact Plating: Au3μ" over 50μ"Ni
Insulator Material: PA6T(UL94V-0)



N=No. of contacts / per row

Dim	Pin Pitch	Pin No.
Dim A	2.54*(N-1)	40
Dim B	2.54*(N-1)	
Pin Length	L=A+H+C	

Part Number:

491XXX 000000

serial number

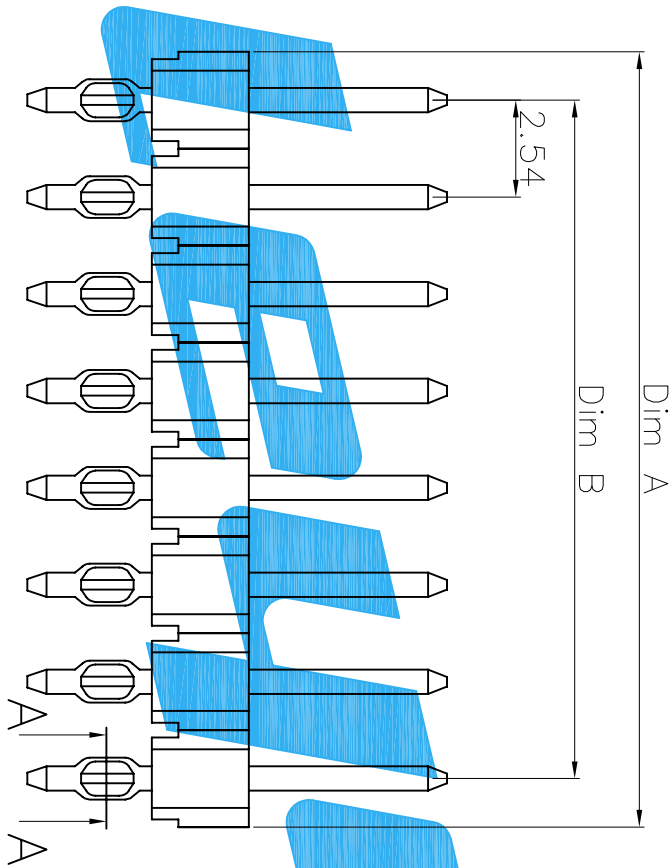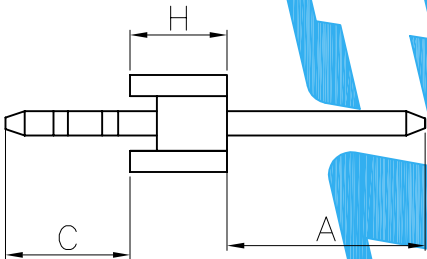

E		Units mm	Scale 4:1	Drawing By	Qqf-Wu	Sheet 1 of 1		Title	2.54mm PIN Header H=2.50mm	REV	A
D		Tolerance Unless Otherwise Specified		Design	Qqf-Wu	Third Angle Projection		DIP Type	鱼眼型针		
C				Release Date	2019/03/01						
B				Approval By	2019/03/01						
A				Date	2019/03/01						
REV				DESCRIPTION							