
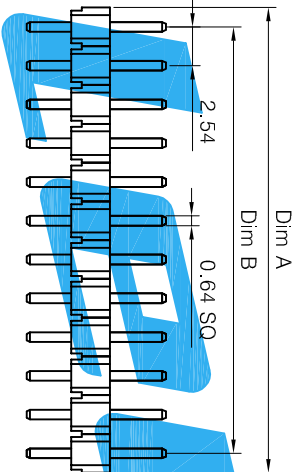


N=No. of contacts / per row		
Dim P位	(1-39)	40
Dim A	2.54*N-0.20	101.6
Dim B	2.54*(N-1)	

SPECIFICATIONS

Current Rating:3A
Contact Resistance:20mΩ Max
Insulation Resistance:1 000MΩ Min
Withstand Voltage:600V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)



Part Number:

31 X NN X X 1 XXX X

Serial number:
Determined by the LEYCONN

PIN Length:

XXX-A+H+C

Number of Row:

1-Single Row

2-Double Row

Pin number of each row:-

01 ~ 40 PIN

Insulator Material:

2-LCP 4-PAD6



5-PAGT 9-PAGT

Tail & Mounting Style:

1-Straight solder

Contact Plated:

0-Tin over nickel,
1-Gold flash over nickel
3-0.075um gold over nickel,
5-0.125um gold over nickel,
6-0.25um gold over nickel,
7-0.375um gold over nickel
8-0.75um gold over nickel,
A-0.02um gold over nickel
B-0.01um gold over nickel
2-0.05um gold over nickel

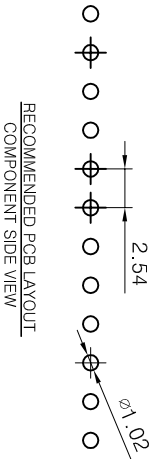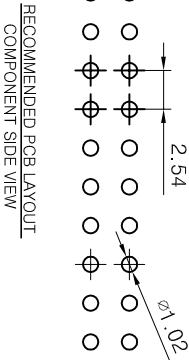

E				Units	mm	Scale	2:1	Drawing By	Date	<div><div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司</div><div>Http://www.leyconn.com</div><div>TEL: +86(755)26078616 FAX: 26070522</div></div>											
D				Tolerance Unless Otherwise Specified				Lin-Wu	2019/02/26												
C								Revised By	Date												
B				.X ~ ±0.30				YP-Liang	2019/02/26	Sheet		1 of 1		Title 2.54mm PIN Header Single/Daul Row,Straight							
A				.XX ~ ±0.25				Approval By	Date	Third Angle Projection										Part No.	
REV				.XXX ~ ±0.20				Kirby-Xiao	2019/02/26					31XNNXX1XXXX							
				Angle ~ ± 3°										REV		A					