
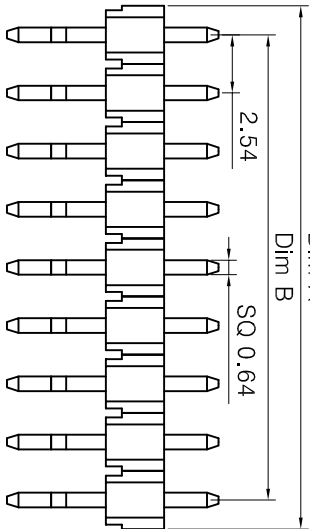
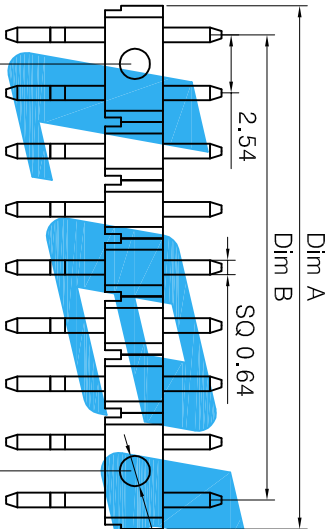
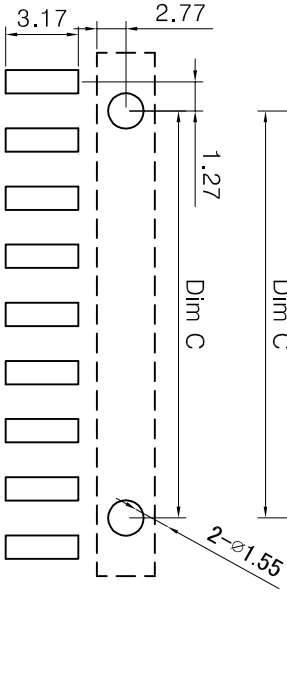
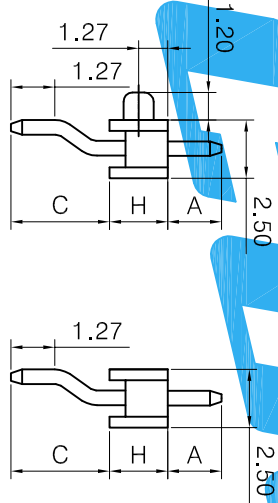


N=No. of contacts / per row

Dim	P位 (1-39)	40
Dim A	2.54*(N-0.20)	101.6
Dim B	2.54*(N-1)	
Dim C	2.54*(N-2)	

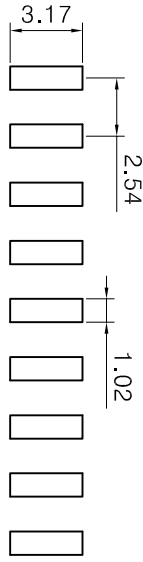

SPECIFICATIONS

Current Rating: 3A
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 600V AC/minute
Operation Temperature: -40°C to +105°C
Contact Material: Phosphor
Contact Plating: Gold or Tin over 50μ"Ni
Insulator Material: Polyester(UL94V-0)



Part Number:

31 1 NN X X 4 XXX X

Number of Row:

Pin number of each row:

Insulator Material:

2-LCP
5-PA6T

Contact Plated:

0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel
A-0.02um gold over nickel
B-0.01um gold over nickel
2-0.05um gold over nickel
1-Matte Tin over nickel

PCB LAYOUT

PCB LAYOUT

LEYCONN

http://www.leyconn.com

LEUYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

E		Units	mm	Scale	3:1	Drawing By	Date	Sheet	1 of 1	Title	2.54mm PIN Header, H=2.50mm Single
---	--	-------	----	-------	-----	------------	------	-------	--------	-------	------------------------------------

D		Tolerance Unless		Otherwise Specified		Reviewed By	Date				
---	--	------------------	--	---------------------	--	-------------	------	--	--	--	--

C		.XX ~ ±0.30				YP-Liang	2019/02/27				
---	--	-------------	--	--	--	----------	------------	--	--	--	--

B		.XX ~ ±0.25				Approval By	Date				
---	--	-------------	--	--	--	-------------	------	--	--	--	--

A		.XXX ~ ±0.20				Kirby-Xiao	2019/02/27				
---	--	--------------	--	--	--	------------	------------	--	--	--	--

REV		DESCRIPTION.		Date		Angle ~ ± 3°					
-----	--	--------------	--	------	--	--------------	--	--	--	--	--

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---