



不帶柱

SPECIFICATIONS
Current Rating:3A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:600V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)

N=No. of contacts / per row		
Pin位	(1-39)	40
Dim A	2.54*N-0.20	101.6
Dim B	2.54*(N-1)	
Dim C	2.54*(N-2)	

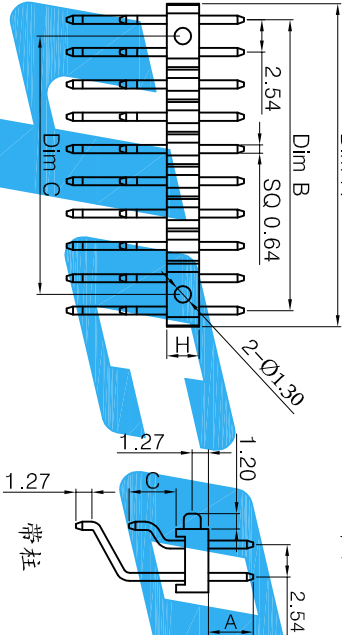


帶柱


Part Number:

31 2 NN X X 4 XXX X

Number of Row: 2-Double Row
Pin number of each row: 03-40PIN
Insulator Material: 2-LCP 4-PA46 6-PA6T 9-PA9T
Serial number: Determined by the LEYCONN
PIN Length: XXX-A+C+2.8
Tail & Mounting Style: 4-Surface mount-Parallel
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel, 2-0.05um gold over nickel

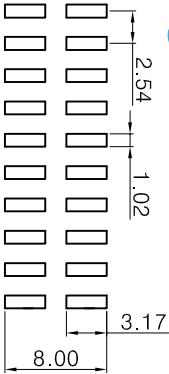

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

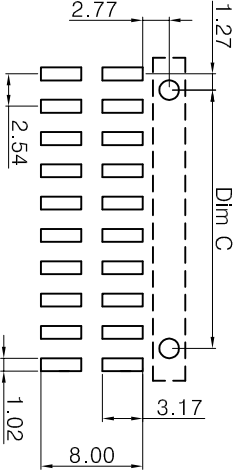

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

Units		Scale		Drawing By		Date	
mm		2:1		Lin-Wu		2019/02/28	
Tolerance Unless		Otherwise Specified		Reviewed By		Date	
.X ~ ±0.30		.XX ~ ±0.25		YP-Liang		2019/02/28	
.XXX ~ ±0.20		Angle ~ ± 3°		Approval By		Date	
Kirby-Xiao		2019/02/28		Third Angle Projection		Part No.	
Sheet		1 of 1		Title		2.54 Pin Header, Dual Row, Right Angle, S.M.T	
REV		DESCRIPTION.		REV		A	

leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522