


Rohs



Current rating: 2amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megohms min. at DC 500V.
Operating Temperature: -55° C ~ +105° C

Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze

416 3 48 2 2 1 X 0 X

Others:

MC

—Solder Length:


1

ns

So

1

- **Contacts Plating:**
 - 1-Gold Flash
 - 3-Gold 3u"
 - 5-Gold 5u"
 - 6-Gold 10u"
 - 7-Gold 15u"
 - 8-Gold 30u"

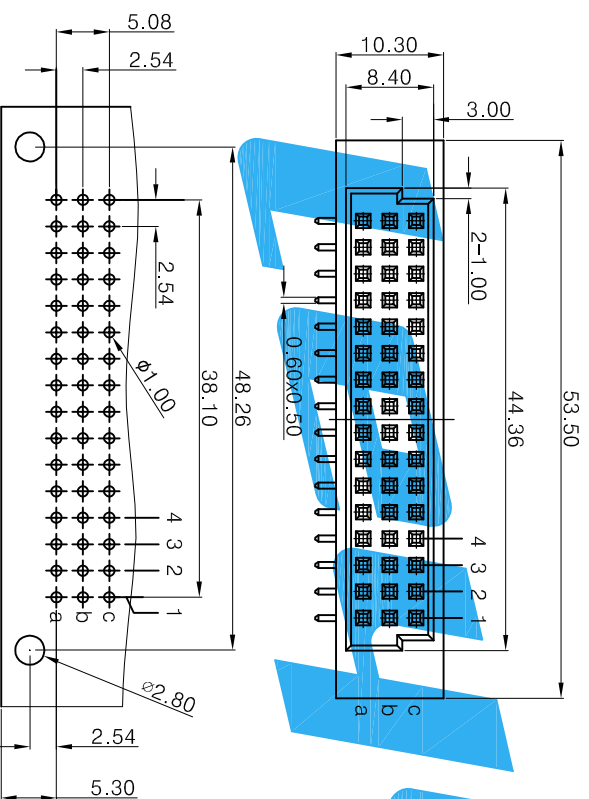

E

E				Units	mm	Scale	1:1	Drawing By	Date	<div>leyconn</div> <div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522</div>				
D				Tolerance Unless				Kirby-Xiao	2013/09/27	Http://www.leyconn.com				
C				Otherwise Specified				Revised By	Date	Sheet 1 of 1				
B				.X ~ ±0.30				Luli-Liu	2013/09/27	Title				
A				.XX ~ ±0.25				Approval By	Date	Third Angle Projection				
REV				.XXX ~ ±0.20				Darren-Zhang	2013/09/27	Part No.				
				Angle ~ ± 3°						DIN 41612 Plug Connector				
										348 母弯系列				
										416348221X0X				
										REV A				

Legend

TEL: +86(755)26078616 FAX: 26070522
Http://www.leyconn.com

Shot	1 of 1
------	--------

1991	101
------	-----

Title	249 母亦多列
DIN 41012 1 Aug collection	

Third Angle Projection

340	母弓ホメ
-----	------

Part No.  

Part No.	416348221X0X
----------	--------------

6

	7
--	---