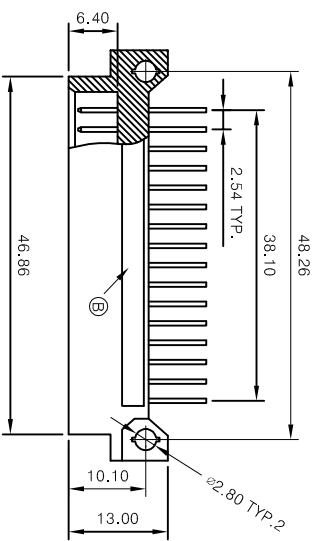


Electrical Data-
Current rating: 2Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:
Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze

Part Number:

416 3 48 1 2 1 X 0 X

Contact Number of Row:

3 - a + b + c row

Number of Contact:

48 PIN

Contact Type:

1-Male

Type affirmations:

2-Right angle solder

Pitch:

1-2.54mm

Others:

Solder Length:

0-3.00mm

Contacts Plating:

1-Gold Flash

3-Gold 3u"

5-Gold 5u"

6-Gold 10u"

7-Gold 15u"

8-Gold 30u"

leyconn
LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522
Http://www.leyconn.com

Sheet 1 of 1
Title DIN 41612 348 公弯系列
Third Angle Projection
Part No. 416348121X0X
REV A

Units		mm	Scale	1:1	Drawing By		Date	Sheet		1 of 1	Title		DIN 41612 348 公弯系列	REV		A
Tolerance Unless		Otherwise Specified			Kirby-Xiao		2019/02/14									
.X ~ ±0.30					Reviewed By		Date									
.XX ~ ±0.25					Luli-Liu		2019/02/14									
.XXX ~ ±0.20					Approval By		Date									
Angle ~ ± 3°					Darren-Zhang		2019/02/14									
DESCRIPTION.		Date														
1		2														
		3														
		4														
		5														
		6														
		7														
		8														