
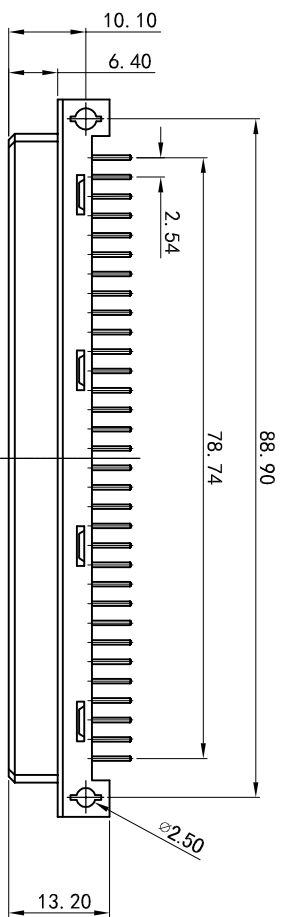


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

Rohs




Electrical Data-


Current rating: 2amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:

Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze

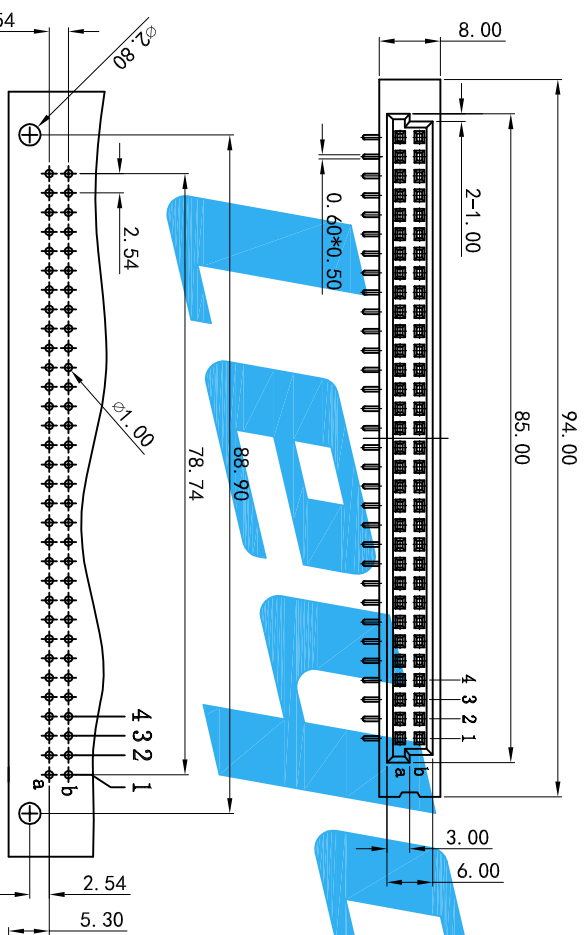

PCB LAYOUT (RECOMMENDED)



Part Number:

416264221X0X

Contact Number of Row: -

2-a + b row

Number of Contact: .

32 PIN

Contact Type:

2-Female

type of fermions: —

2-Right angle solder

Pitch: _____

1-2.54mm

Others:

↳ Solder Length:

0-3.00mm

- Contacts Plating:

1-Gold Flash

2-Gold 2u'

3-Gold 3u"

5-Gold 511'

6-Gold 101

7-Gold 151

Gold 30.11

E				Units	mm	Scale	1:1	Drawing By	Date	<div> LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522 Http://www.leyconn.com</div>																					
D				Tolerance Unless Otherwise Specified				Hui-Wen	2015/09/04	Sheet	1 of 1	Title	DIN 41612 264母弯系列																		
C								Revised By	Date	Third Angle Projection		Part No.	416264221X0X																		
B				.X ~ ±0.30				Nick-Yin	2015/09/04																						
A				.XX ~ ±0.25				Approval By	Date																						
				.XXX ~ ±0.20																											
REV				Angle ~ ± 3°				Kirby-Xiao	2015/09/04																						
1				2				3				4				5				6				7				8			