

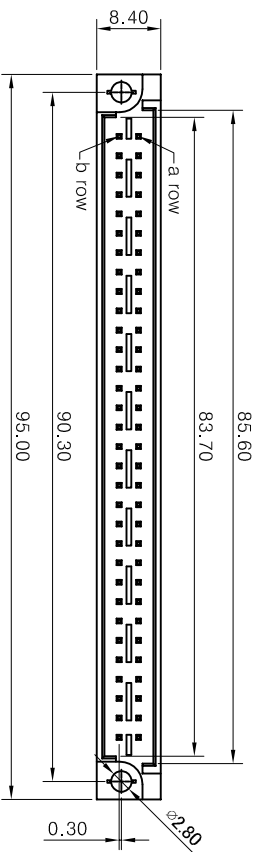
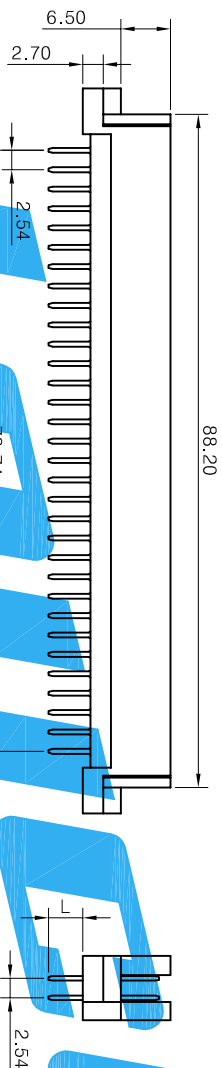



This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

Rohs

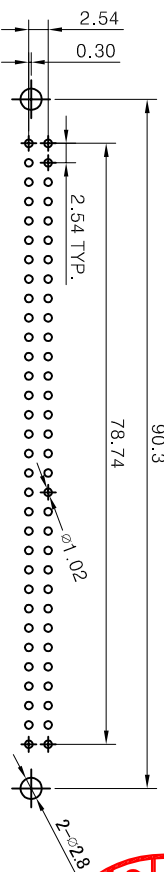

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



Electrical Data-
Current rating: 2Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:

Insulator: 30% Glass Filled PB
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze

Part Number:

416 2 64 1 1 1 XXXX

Contact Number of Row: -

2-a + b row

Number of Contact:

64 PIN

Contact Type:

1-Male

type after

1-Straight solder

Pitch: _____

Others:

Solder Length:

0-3.00mm 1-4.00mm

2-2.50mm 3-13.00mm

4-17.00mm 5-4.50mm

- Contacts Plating:

1-Gold Flash

3-Gold 3u"

5-Gold 5u"

6-Gold 10u"

8-Gold 30u"

E				Units	mm	Scale	1:1	Drawing By	Date	<div> LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522</div>					
D				Tolerance Unless Otherwise Specified				Hu i-Wen	2015/09/04	Http://www.leyconn.com					
C								Revived By	Date	Sheet 1 of 1					
B				.X ~ ±0.30				Nick-Yin	2015/09/04	Title		DIN 41612 264公直系列			
A				.XX ~ ±0.25				Approval By	Date	Third Angle Projection		Part No.			
REV				.XXX ~ ±0.20				Kirby-Xiao	2015/09/04			416264111XXX			
				Angle ~ ± 3°								REV A			
1		2		3		4		5		6		7		8	