This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

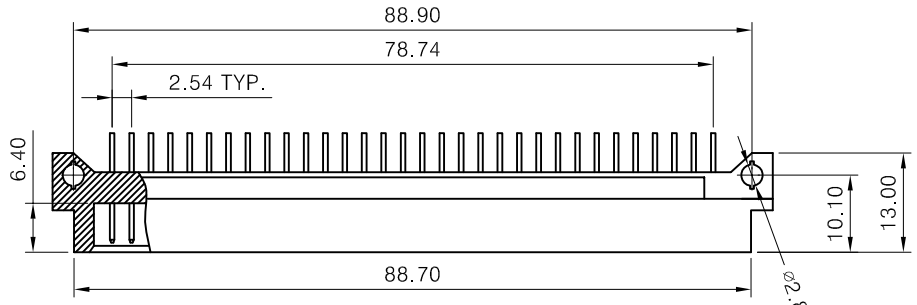

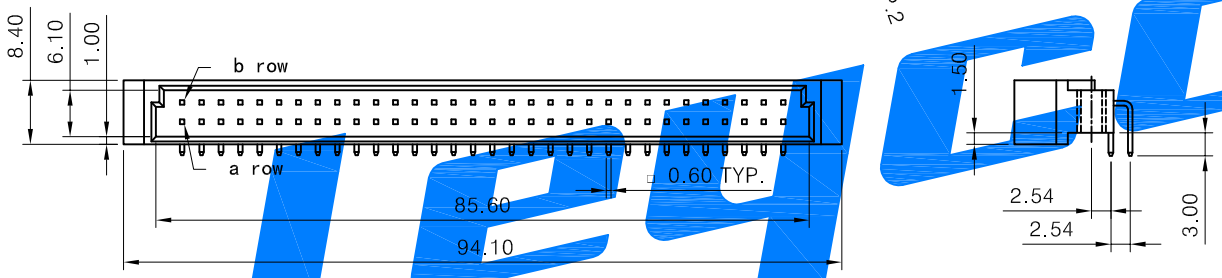

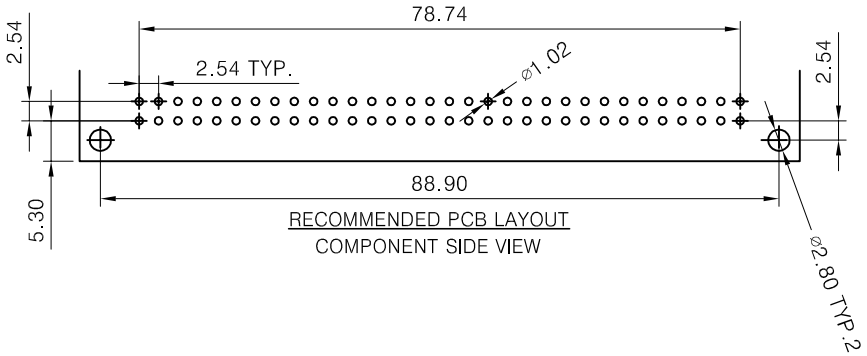

Electrical Data-

Current rating: 2Amps
Dieltric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:

Insulator: 30% Glass Filled PBT
Flammalility Rating: UL 94V-0
Contacts: Phosphor Bronze

Part Number:

416 2 64 1 2 1 X 0 X

- Contact Number of Row: 2- a + b row
- Number of Contact: 64 PIN
- Contact Type: 1-Male
- Type offerminations: 2-Right angle solder
- Pitch: 1-2.54mm
- Contacts Plating: 1-Gold Flash, 3-Gold 3u", 5-Gold 5u", 6-Gold 10u", 7-Gold 15u", 8-Gold 30u"
- Solder Length: 0-3.00mm
- Others:

ISSUED
Leyconn
CONFIDENTIAL
2018-06-25

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	25/06/18

Units: mm | Scale: 1:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

		Date
Drawing By	Hui-Wen	2018/06/25
Reviwed By	Nick-Yin	2018/06/25
Approval By	Kirby-Xiao	2018/06/25

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet: 1 of 1
Third Angle Projection

Title: DIN 41612 264公弯系列
Part No.: 416264121X0X
REV: A