


Electrical Data-
Current rating: 2Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:
Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze



PCB LAYOUT(RECOMMENDED)

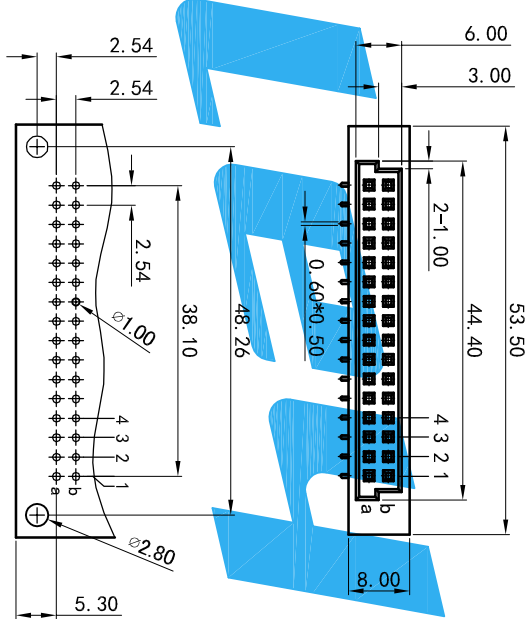

Part Number:

416 2 32 2 2 1 X 0 X

- Contact Number of Row: 2- a + b row
- Number of Contact: 32 PIN
- Contact Type: 2-Female
- Type offerminations: 2-Right angle solder
- Pitch: 1-2.54mm
- Others: Solder Length: 0-3.00mm
- Contacts Plating: 1-Gold Flash, 2-Gold 2u", 3-Gold 3u", 5-Gold 5u", 6-Gold 10u", 7-Gold 15u", 8-Gold 30u"

E				Units	mm	Scale	1:1	Drawing By	Hui-llen	Date	2015/09/04	<div><div>LEYCONN ELECTRONICS CO.,LTD.</div><div>深圳市联益康电子有限公司</div><div>TEL: +86(755)26078616 FAX: 26070522</div></div>				
D				Tolerance Unless		Otherwise Specified		Revised By		Date	2015/09/04					
C				.X ~ ±0.30		.XX ~ ±0.25		Nick-Yin		Date	2015/09/04					
B				.XXX ~ ±0.20		Angle ~ ± 3°		Approval By		Date	2015/09/04					
A				RELEASED		04/09/15										
REV				DESCRIPTION.		Date										
1				2		3		4		5		6		7		8
<div><div>LEYCONN</div><div>Third Angle Projection</div><div>Sheet 1 of 1</div><div>Title</div><div>DIN 41612 232母弯系列</div><div>Part No.</div><div>41623221X0X</div><div>REV</div><div>A</div></div>																