

Electrical Data-

Current rating: 3Amps

Dielectric Withstanding Voltage: 1000VAC for one minute

Contact Resistance: < 30 Milliohms

Insulation Resistance: > 1000 Megaohms min. at DC 500V.


Operating Temperature: -55°C ~ +105°C

Construction:

Insulator: 30% Glass Filled PBT

Flammability Rating: UL 94V-0

Contacts: Brass

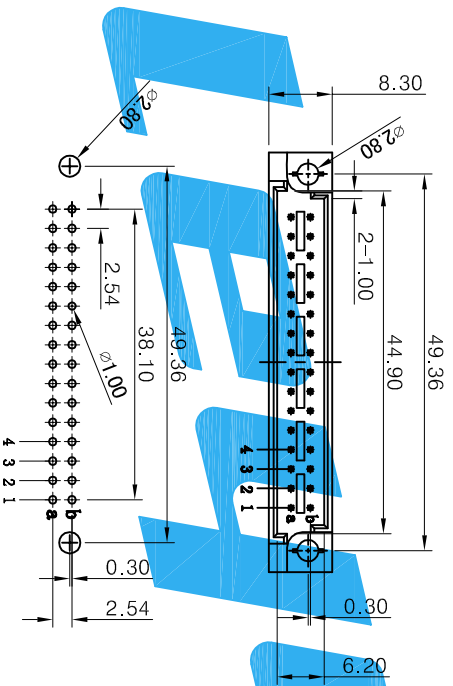

Part Number:

416 2 32 1 1 1 X X X

Contact Number of Row: 2 - a + b row

Number of Contact: 32

Contact Type: 1 - Male

Type of terminations: 1 - Straight solder

Pitch: 1 - 2.54mm

Others: Solder Length: 0-3.00mm, 1-4.00mm, 2-2.50mm, 3-13.00mm, 4-17.00mm

Contacts Plating: 1-Gold Flash, 2-Gold 3u", 3-Gold 5u", 4-Gold 10u", 5-Gold 15u", 6-Gold 30u"

E				Units	mm	Scale	1:1	Drawing By	Date	<div><div><div>LEYCONN ELECTRONICS CO.,LTD.</div><div>深圳市联益康电子有限公司</div><div>Http://www.leyconn.com</div><div>TEL: +86(755)26078616 FAX: 26070522</div></div></div>							
D				Tolerance Unless Otherwise Specified				Hui-Wen	2015/09/04	Sheet		1 of 1		Title	DIN 41612 公直232系列		
C								Reviewed By	Date	Third Angle Projection				Part No.	41623211XXX		
B				.X ~ ±0.30				Nick-Yin	2015/09/04	⌀		≡					
A				.XX ~ ±0.25				Approval By	Date								
REV				.XXX ~ ±0.20													
	DESCRIPTION.	Date	Angle ~ ± 3°					Kirby-Xiao	2015/09/04								
1	2	3	4	5	6	7	8										