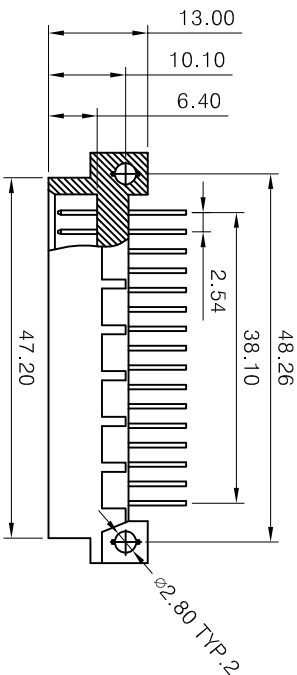
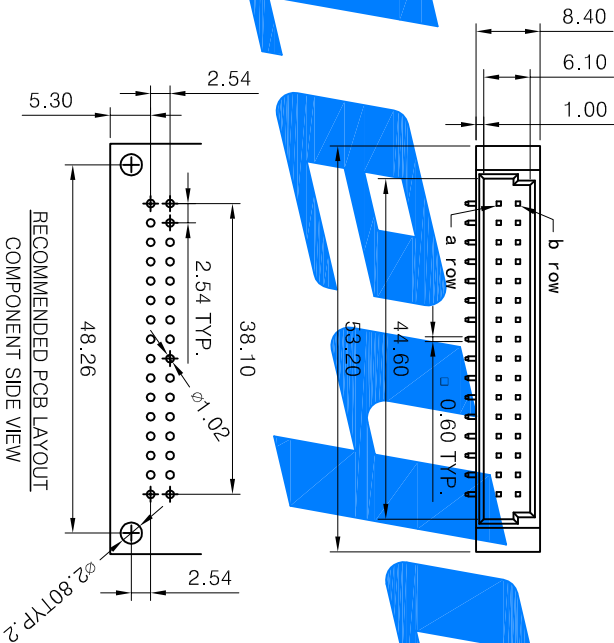


Electrical Data-
Current rating: 2Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:
Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Brass Bronze

Part Number:

416 2 32 1 2 1 X 0 X

Contact Number of Row: 2 - a + b row
Number of Contact: 32 PIN
Contact Type: 1 - Male
Type offermnations: 2 - Right angle solder
Pitch: 1 - 2.54mm
Others: Solder Length: 0 - 3.00mm
Contacts Plating: 1 - Gold Flash, 2 - Gold 2u", 3 - Gold 3u", 5 - Gold 5u", 6 - Gold 10u", 7 - Gold 15u", 8 - Gold 30u"

E				Units	mm	Scale	1:1	Drawing By	Date	<div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522</div>					
D				Tolerance Unless				Hui-Wen	2015/09/04	<div>Sheet1 of 1</div> <div>Third Angle Projection</div> <div>TitleDIN 41612 232公弯系列</div> <div>Part No.416232121X0X</div> <div>REV A</div>					
C				Otherwise Specified				Reviewed By	Date						
				.X ~ ±0.30											
B				.XX ~ ±0.25				Nick-Yin	2015/09/04						
A				.XXX ~ ±0.20				Approval By	Date						
REV				Angle ~ ± 3°				Kirby-Xiao	2015/09/04						
1		2		3		4		5		6		7		8	