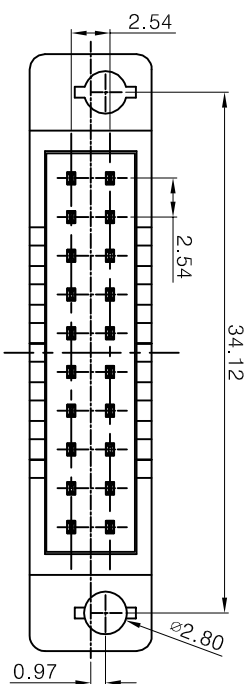
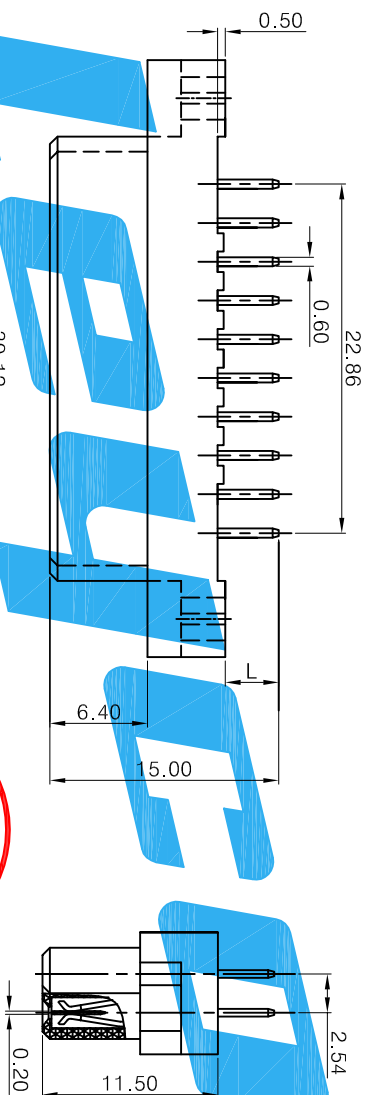


Electrical Data-
Current rating: 2Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:
Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze

Part Number:

416 2 20 2 1 1 X X X

Contact Number of Row: 1

2 - a + b row

Number of Contact: 20

Contact Type: 2-Female

Type offerrinations: 1-DIP Type

Pitch: 1-2.54mm

Others:

Solder Length: 0-3.00mm

1-4.00mm

2-2.50mm

3-13.00mm

4-17.00mm

Contacts Plating:

1-Gold Flash

2-Gold 3u"

3-Gold 5u"

4-Gold 10u"

5-Gold 15u"

6-Gold 30u"

E				Units	mm	Scale	2:1	Drawing By	Date	<div><div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL.: +86(755)26078616 FAX: 26070522</div></div>				
D				Tolerance Unless			Hui-Wen	2015/09/04						
C				Otherwise Specified			Revised By	Date						
B				.X ~ ±0.30			Nick-Yin	2015/09/04						
A				.XX ~ ±0.25			Approval By	Date						
REV				.XXX ~ ±0.20			Kirby-Xiao	2015/09/04						
DESCRIPTION.		Date	Angle ~ ± 3°											
1	2	3	4	5	6	7	8							