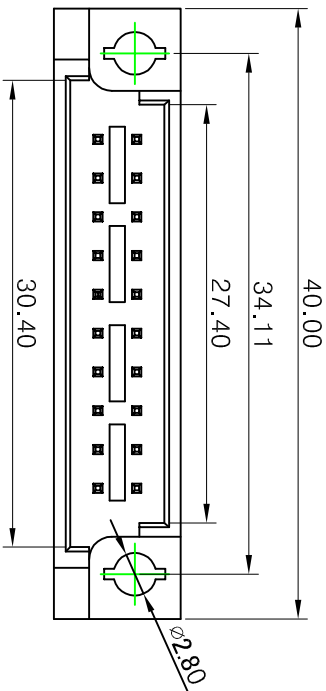
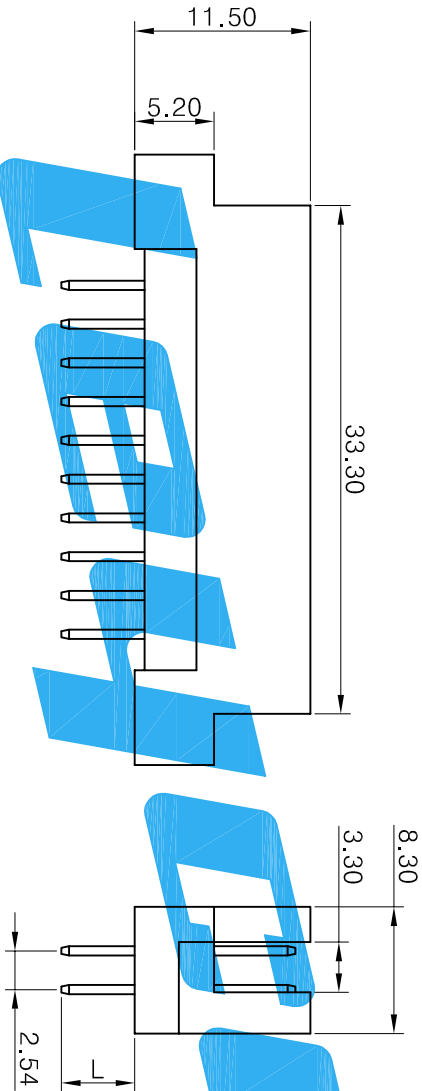


Electrical Data-
Current rating: 2Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 30 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:
Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Brass

Part Number:

416 2 20 1 1 1 X X X

Contact Number of Row: 2 - a + b row
Number of Contact: 20
Contact Type: 1 - Male
Type offerrinations: 1 -DIP Type
Pitch: 1 -2.54mm
Solder Lenght: 0-3.00mm
1-4.00mm
2-2.50mm
3-13.00mm
4-17.00mm
Contacts Plating: 1-Gold Flash
2-Gold 3u"
3-Gold 5u"
4-Gold 10u"
5-Gold 15u"
6-Gold 30u"

E		Units	mm	Scale	2:1	Drawing By	Date	Sheet	1 of 1	Title	DIN 41612 公直220系列	REV	A
D		Tolerance Unless				Hui-Wen	2015/09/04	Http://www.leyconn.com		深圳市联益康电子有限公司			
C		Otherwise Specified				Revised By	Date	Third Angle Projection		TEL: +86(755)26078616	FAX: 26070522		
B		.X ~ ±0.30				Nick-Yin	2015/09/04						
A		.XX ~ ±0.25				Approval By	Date						
REV		.XXX ~ ±0.20				Kirby-Xiao	2015/09/04						
1	2	3	4	5	6	7	8						