


Rohs

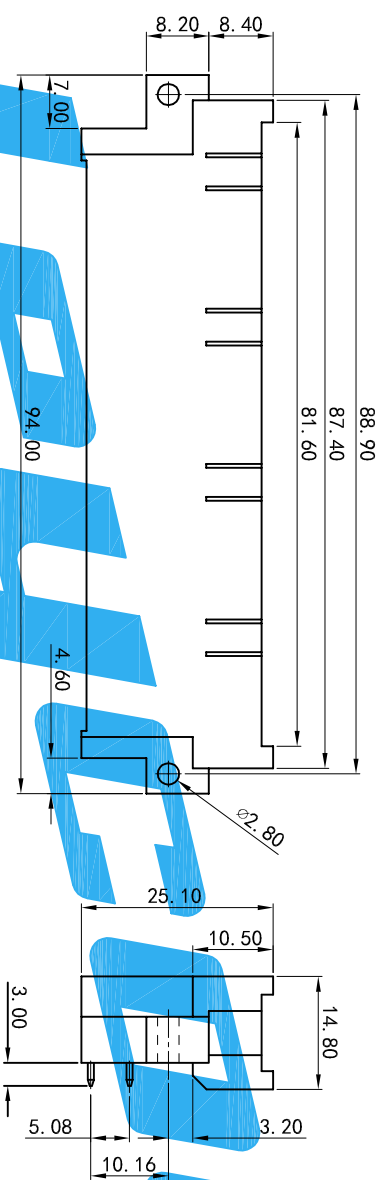

Construction:
Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze

$$416 \overline{) 21512200X}$$

 $2 - a + b \text{ row}$

older Length:
0-3.00mm

Contacts Platin


Contacts Plating: 1-Gold Flash

3-Gold 3u"

6-Gold 10"

7-Gold 1511"

8-Gold 30u"

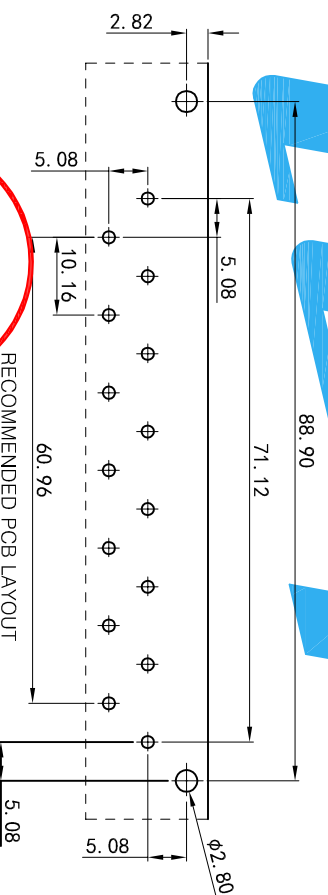

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

ISSUED

Leocomm
CONFIDENTIAL

2016-03-22

E				Units	mm	Scale	1:1	Drawing By	Date	<div>LEYCONN ELECTRONICS CO.,LTD.</div> <div>深圳市联益康电子有限公司</div> <div>TEL: +86(755)26078616 FAX: 26070522</div>							
D				Tolerance Unless				Hui-Wen	2016/03/22	<div>LEYCONN</div> <div>Http://www.leyconn.com</div>							
C				Otherwise Specified				Reviewed By	Date	Sheet	1 of 1	Title	DIN 41612 215-公座弯脚焊板（大电流）				
B				.X ~ ±0.30				Nick-Yin	2016/03/22	Third Angle Projection				Part No.	416215122XOX	REV	A
A				.XX ~ ±0.25				Approval By	Date								
				.XXX ~ ±0.20													
REV				Angle ~ ± 3°				Kirbyv-Xiao	2016/03/22								
F				DESCRIPTION.	Date												
<div>LEYCONN</div> <div>CONFIDENTIAL</div> <div>2016-03-22</div>																	

Legend

<http://www.leycom.com>

1 of 1

[illegible]

Third Angle Projection



LEYCONN ELECTRONICS CO., LTD.

深圳市联益康电子有限公司

TEL: +86(755)26078616 FAX: 26070522

10

Title	DIN 41612 215-公座弯脚焊板 (大电流)
-------	----------------------------

Part No.

41

REV |