

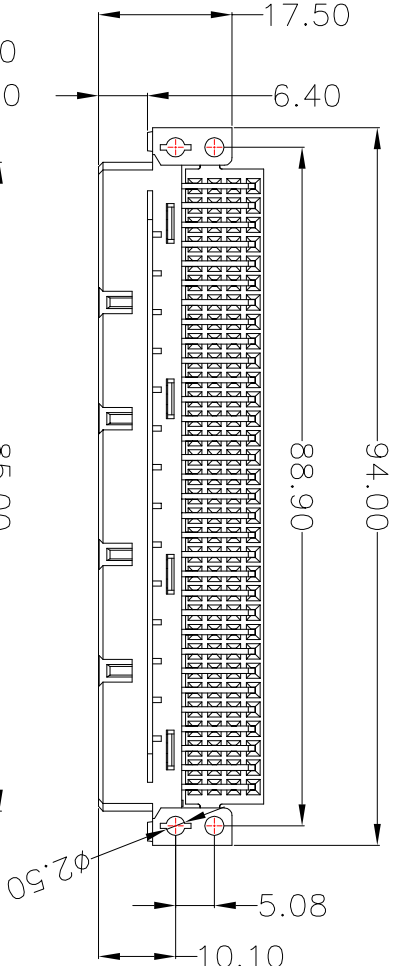



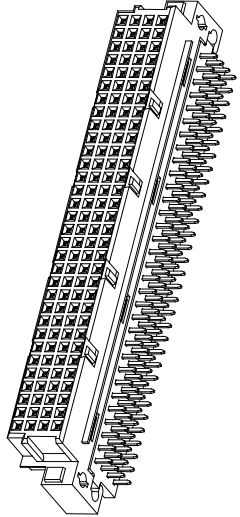

Electrical Data-
Current rating: 2Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 20 Milliohms
Insulation Resistance: > 1000 Megaohms min. at DC 500V.
Operating Temperature: -55°C ~ +105°C

Construction:
Insulator: 30% Glass Filled PBT
Flammability Rating: UL 94V-0
Contacts: Phosphor

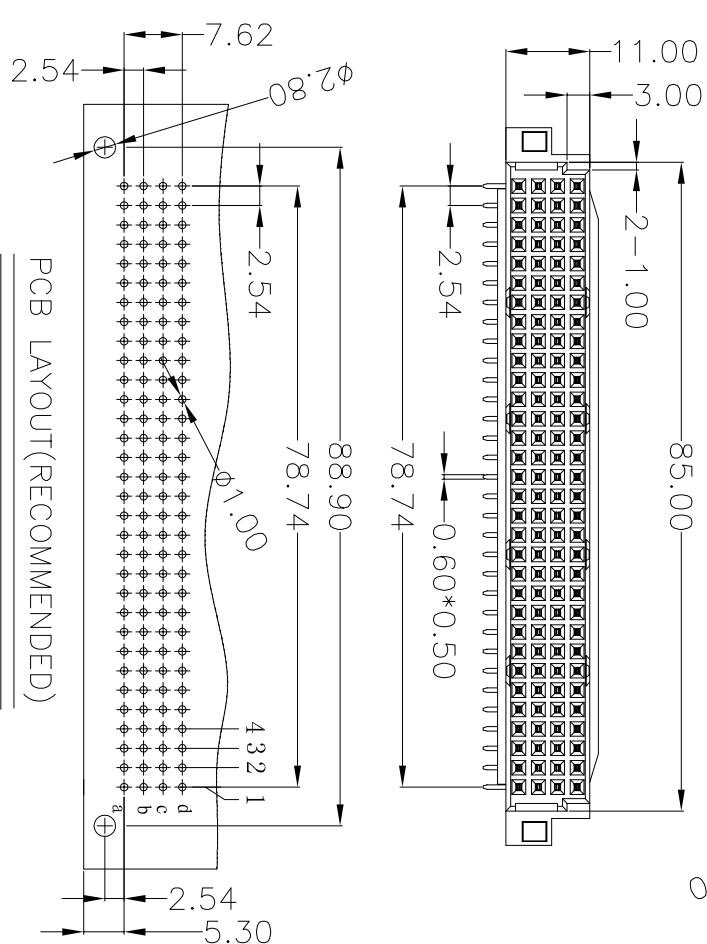

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)



Part Number:

416 4 A3 2 2 1 X 0 N

Contact Number of Row: 4 - a + b + c +d row
Number of Contact: A3-128P
Contact Type: 2-Female
Type of terminations: 2-Right angle solder
Pitch: 1-2.54mm
Contacts Plating: 1-Gold Flash 2-Gold 3u" 3-Gold 5u" 4-Gold 10u" 5-Gold 15u" 6-Gold 30u"

E				Units	mm	Scale	1:1	Drawing By	Date	<div><div><div>leyconn</div></div><div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522</div></div>			
D				Tolerance Unless Otherwise Specified				L in-Wu	2017/04/18	Http://www.leyconn.com			
C								Reviewed By	Date	Sheet		1 of 1	
				.X ~ ±0.30				Nick-Yin	2017/04/18	Title		欧式插座 4-120P Female Right Angle Type	
B				.XX ~ ±0.25				Approval By	Date	Third Angle Projection		Part No.	
A				.XXX ~ ±0.20								4164A3221X0N	
REV				Angle ~ ± 3°				Kirby-Xiao	2017/04/18			REV A	
1		2		3		4		5		6		7	
												8	