
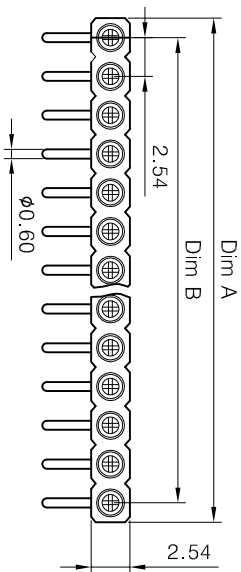

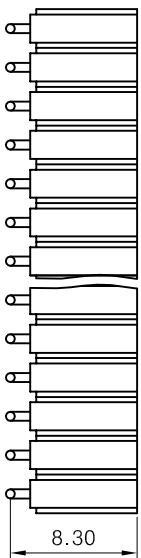


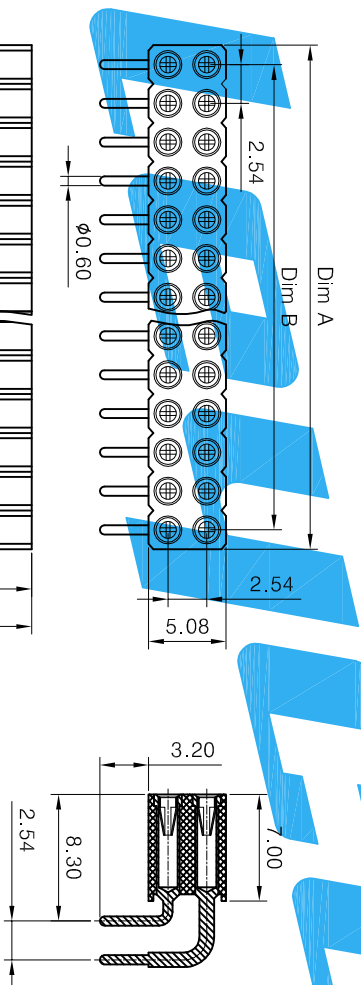

Technical Specs:
Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3 (C36000)
Contact clip (6 finger): Beryllium copper (C17200)
Mechanical life: min 500 cycles
Rated current: 3 A
Contact resistance: max 10mΩ
Dielectric strength: min 1000 V RMS
Mating pins: Outside Diameter 0.64 to 0.90 mm
Forces: (polished steel gauge 0.76 mm)
Insertion: 1.2 N typ.
Withdrawal: 0.6 N typ
Pin Part Number: P223X651X0T & P224X651X0T

Dim	P位	(1-39)	40
Dim A	2.54*(N-0.20)	101.6	
Dim B	2.54*(N-1)		

Part Number:

141 NN X 7 2 X 223

Pitch: 1-2.54mm (0.100in)

Pin number of each row: 01 ~ 40 PIN

Number of Rows: 1-Single Row 2-Double Row

Insulator Height: 7 - 7.00mm

Tail & Mounting Style: 2 - Right solder pin

Plated Code:

(Pin Sleeve / Contact Clip):

- 0 - Tin / Tin
- 1 - Tin / Gold Flash
- 2 - Gold Flash / Gold Flash 1u"
- 3 - Tin / 0.075um gold 3u"
- 5 - Tin / 0.125um gold 5u"
- 6 - Tin / 0.25um gold 10u"
- 7 - Tin / 0.375um gold 15u"
- 8 - Tin / 0.75um gold 30u"

ISSUED

LEYCONN
CONFIDENTIAL
2019-04-15

E	Units	mm	Scale	2:1	Drawing By	Date	Sheet	1 of 1	Title	2.54mm SIP Socket	REV	A
D	Tolerance Unless	Otherwise Specified			Lin-Wu	2019/04/15	Http://www.leyconn.com		深圳市联益康电子有限公司			
C					Revised By	Date						
B					YP-Liang	2019/04/15						
A	RELEASED	15/04/19	.XXX	~ ±0.20	Approval By	Date						
REV	DESCRIPTION.	Date	Angle	~ ± 3°	Kirby-Xiao	2019/04/15	Third Angle Projection		Part No.	141NNX72X223		