

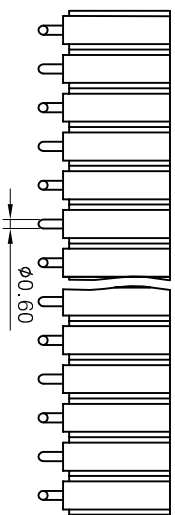

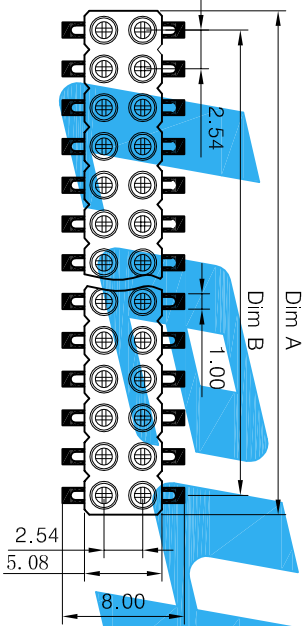



N=No. of contacts / per row			
Dim	P _位	(1-39)	40
Dim A		2.54*N-0.20	101.6
Dim B		2.54*(N-1)	



Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3 (C36000)
Contact clip (6 finger): Beryllium copper (C17200)
Mechanical life: min 500 cycles
Rated current: 3 A
Contact resistance: max 10mΩ
Dielectric strength: min 1000 V RMS
Mating pins: Outside Diameter 0.64 to 0.90 mm
Forces: (polished steel gauge Ø0.76 mm)
Insertion: 1.2 N typ.
Withdrawal: 0.6 N typ.



Coplanarity SMD terminations: max 0.1mm
(measured on 25mm long connectors)
Pin Part Number: P220X651X0T

Part Number:

141 NN X 7 3 X 220

Pitch: 1-2.54mm (0.100in)
Pin number of each row: 01 ~ 40 PIN
Number of Rows: 1-Single Row 2-Double Row
Insulator Height: 7 - 7.0mm
Tail & Mounting Style: 3 - Surface mount-perpendicular

Plating Code:
(For PIN Connectors)
0 - Tin
1 - Gold Flash 1u"
3 - 0.075um Gold 3u"
5 - 0.125um Gold 5u"
6 - 0.25um Gold 10u"
7 - 0.375um Gold 15u"
8 - 0.75um Gold 30u"

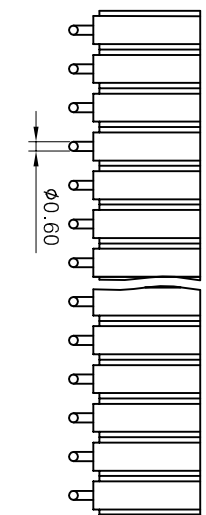

Tail & Mounting Style: 3 - Surface mount-perpendicular



LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com

Sheet 1 of 1 Title 2.54mm SIP Socket

Third Angle Projection Part No. 141NN273X220

REV A

DESCRIPTION. Date 2019/04/15

Angle ~ ± 3°