

Operating temperature range : -60°C ~ +85°C.

Pin Part Number: P266X430X00

N=No. of contacts / per row

$\begin{matrix} \text{Dim} & \text{P位} \end{matrix}$	(1-39)	40
Dim A	2.54*N-0.20	101.6
Dim B	2.54*(N-1)	

ISSUED
leycom
CONFIDENTIAL
2016-06-04

Part Number:

141 NN X 3 1 X 266

Pitch: _____ PIN Code: _____


Pin number _____

Number of Rows:

1 - 1in / Gold Flash
2 - Gold Elong / Gold Elong 1.1"

Insulator Height:

Tail & Mounting Style:

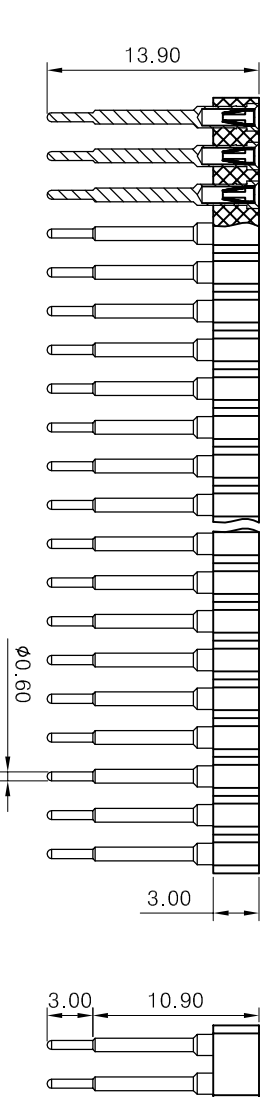

E			Units	mm	Scale	2:1	Drawing By	Date	<div></div> LEYCONN ELECTRONICS CO.,LTD 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522						
D			Tolerance Unless Otherwise Specified				Hui-Wen	2016/06/04							
C							Reviewed By	Date	Sheet		1 of 1		Title	2.54mm SLP Socket H3.00mm DIP Type L13.90	
F	B		.X ~ ±0.30				Nick-Yin	2016/06/04	Third Angle Projection				Part No.	141NNX31X266	
A			.XX ~ ±0.25				Approval By	Date							
			.XXX ~ ±0.20												
REV			Angle ~ ± 3°				Kirby-Xiao	2016/06/04						REV	
			DESCRIPTION.												