
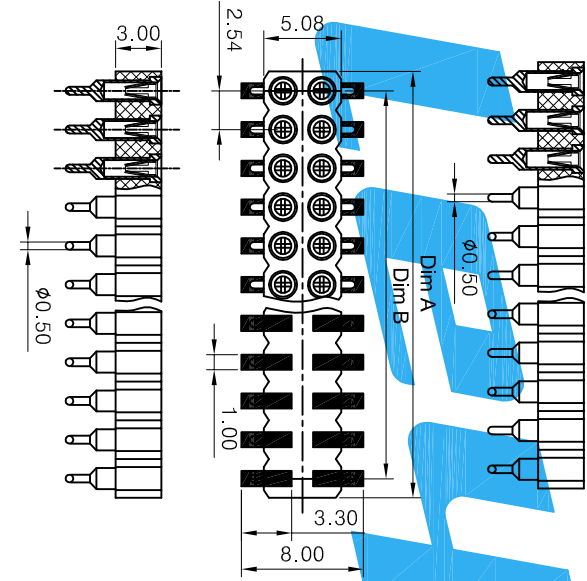


N=No. of contacts / per row		
Dim P 位	(1-39)	40
Dim A	2.54*N-0.20	101.6
Dim B	2.54*(N-1)	



Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass
Contact clip (4 finger): Beryllium copper (C17200)
Mechanical life: min 500 cycles
Rated current: 3 A
Contact resistance: max 20mΩ
Dielectric strength: min 500 V RMS
Mating pins: Outside Diameter 0.38 to 0.63 mm
Forces: (polished steel gauge 0.432 mm)
Insertion: 270g typ.
Withdrawal: 90g typ.

Part Number:

141 NN X 3 3 X 219

Pitch: 1-2.54mm (0.100in)
Pin number of each row: 01 ~ 40 PIN
Number of Rows: 1-Single Row 2-Double Row
Insulator Height: 3 - 2.80 & 3.00mm
Tail & Mounting Style: 3 - Surface mount-perpendicular
PIN Code:
Plating Code: (For DUAL-IN-LINE Sockets ; Contact body /Clip plating)
0 - Tin
1 - Tin/Gold Flash 1u"
2 - Gold Flash/Gold Flash 1u"
3 - Tin/0.075um Gold 3u"
5 - Tin/0.125um Gold 5u"
6 - Tin/0.25um Gold 10u"
7 - Tin/0.375um Gold 15u"
8 - Tin/0.75um Gold 30u"

E		Units	mm	Scale	2:1	Drawing By		Date	Leyconn	
D		Tolerance Unless Otherwise Specified				Lin-Wu		2019/04/15	LEYCONN ELECTRONICS CO.,LTD.	
C		.X ~ ±0.30				Revised By		Date	深圳市联益康电子有限公司	
B		.XX ~ ±0.25				YP-Liang		2019/04/15	TEL: +86(755)26078616 FAX: 26070522	
A		.XXX ~ ±0.20				Approval By		Date	2.54mm SIP Socket	
REV		Angle ~ ± 3°				Ki rby-Xiao		2019/04/15	H=3.00mm S.M.T Type	
1		DESCRIPTION.				Third Angle Projection		Part No.	141 NN X 3 3 X 219	
2		Date				REV		A		