
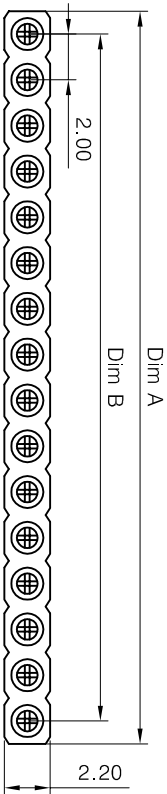
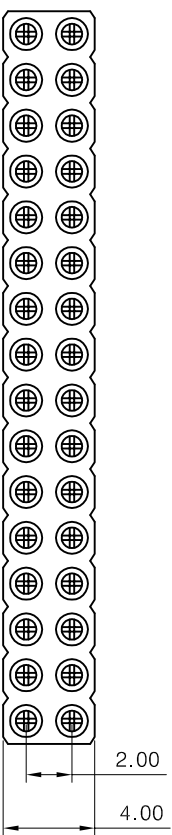
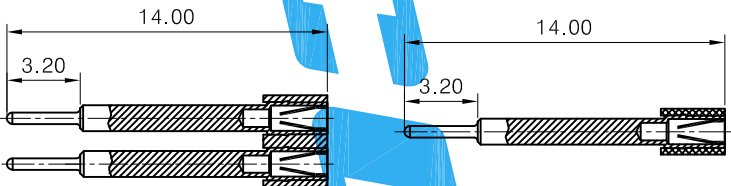


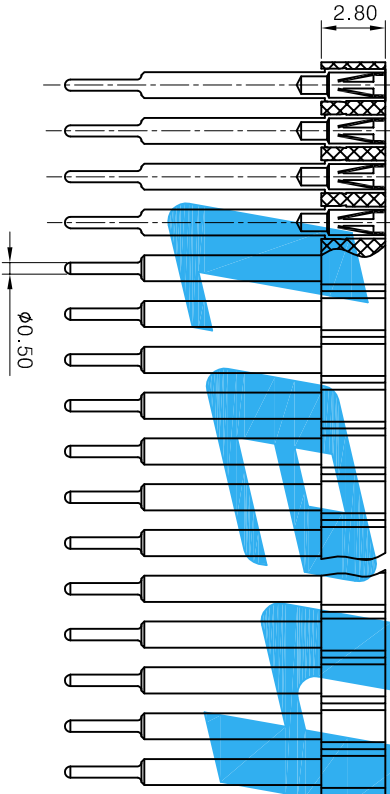

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3 (C36000)
Contact clip (4 finger): Beryllium copper (C17200)
Mechanical life: min 500 cycles
Rated current: 2 A
Contact resistance: max 10mΩ
Dielectric strength: min 500 V RMS
Mating pins: Outside Diameter 0.40 to 0.66 mm
Forces: (polished steel gauge 0.46 mm)
Insertion: 2.5 N typ.
Withdrawal: 0.7N typ.
Pin Part Number: P182X432X01

N=No. of contacts / per row	Pitch	Dim A	Dim B
(1-39)	2.0*(N-1)	80.5	78.0

Part Number:


148 NN X 3 1 X 169

Pitch: 8-2.00mm (0.0787in)
Pin number of each row: 01 ~ 40 PIN
Number of Rows: 1-Single Row 2-Double Row
Insulator Height: 3 ~ 2.80mm
Tail & Mounting Style: 1 - Straight solder

PIN Code:

Plated Code (Pin Sleeve / Contact Clip):

0 - Tin / Tin
1 - Tin / Gold Flash
2 - Gold Flash / Gold Flash 1u"
3 - Tin / 0.075um gold 3u"
5 - Tin / 0.125um gold 5u"
6 - Tin / 0.25um gold 10u"
7 - Tin / 0.375um gold 15u"
8 - Tin / 0.75um gold 30u"



leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司

Http://www.leyconn.com

TEL: +86(755)26078616 FAX: 26070522

Drawing By
Lin-Wu
Date
2019/04/15

Reviewed By
YP-Liang
Date
2019/04/15

Approval By
Kirby-Xiao
Date
2019/04/15

Sheet
1 of 1

Third Angle Projection

Title
2.00mm SIP Socket H=2.80mm
L9.40mm DIP Type

Part No.
148NNX31X169

REV
A

E	Units	mm	Scale	3:1
D	Tolerance Unless			
C	Otherwise Specified			
B	.X ~ ±0.30			
A	.XX ~ ±0.25			
REV	RELEASED	15/04/19		
	DESCRIPTION.	Date	Angle ~ ± 3°	