


Technical Specs:
Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass
Contact clip (6 finger PIN:630): Beryllium copper (C17200)
Mechanical life: min 500 cycles
Rated current: 3 A
Dielectric strength: min 1000 V RMS
Contact resistance: max 10 mΩ
Mating pins: Outside Diameter 0.38 to 0.63 mm
Forces: (polished steel gauge Outside Diameter 0.432mm)
Insertion: 270g typ.
Withdrawal: 90g typ.
N=No. of contacts / per row

Dim	P位	
Dim A	(1-39)	40
Dim A	2.0*N	80.5
Dim B	2.0*(N-1)	78.0

Part Number:

148 NN X 3 1 X 167

Pitch: 8-2.00mm (0.0787in)
Pin number of each row: 01 ~ 40 PIN
Number of Rows: 1-Single Row 2-Double Row
Insulator Height: 3 - 2.80 & 3.00mm
Tail & Mounting Style: 1-Straight solder
PIN Code:
Plated Code (For PIN Socket):
1 - Tin / Gold Flash
2 - Gold Flash / Gold Flash 1u"
3 - Tin / 0.075um gold 3u"
5 - Tin / 0.125um gold 5u"
6 - Tin / 0.25um gold 10u"
7 - Tin / 0.375um gold 15u"
8 - Tin / 0.75um gold 30u"

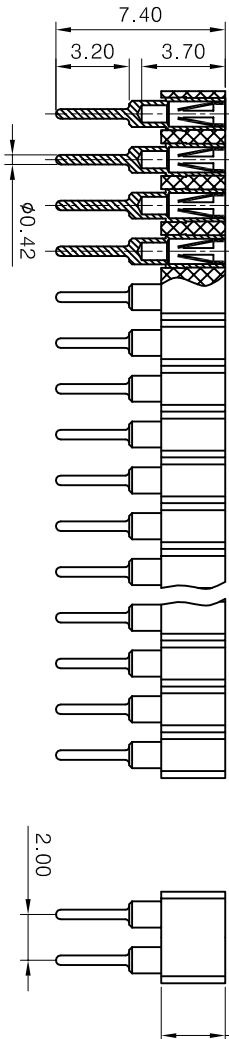

ISSUED

LEYCONN
CONFIDENTIAL

2019-04-15

E	Units	mm	Scale	5:1	Drawing By	Date
D	Tolerance Unless	Otherwise Specified			Lin-Wu	2019/04/15
C		X ~ ±0.30			YP-Liang	2019/04/15
B		.XX ~ ±0.25			Approval By	Date
A	RELEASED	.XXX ~ ±0.20			Kirby-Xiao	2019/04/15
REV	DESCRIPTION.	Angle ~ ± 3°				

LEYCONN

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com

2.00mm SIP Socket H=2.80mm DIP Type

Sheet 1 of 1

Title

Third Angle Projection

Part No.

148NNX31X167

REV A