



Technical Specs:


Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3 (C36000)
Contact clip (4 finger): Beryllium copper (C17200)
Mechanical life: min 500 cycles
Rated current: 2 A
Contact resistance: max 20mΩ
Dielectric strength: min 300 V RMS
Mating pins: Outside Diameter 0.38 to 0.56 mm
Forces: (polished steel gauge 0.46 mm)
Insertion: 2.0 N typ.
Withdrawal: 0.6 N typ.

Dim	P7位	(1-39)	40
Dim A	2.0*N		
Dim B	2.0*(N-1)		
	78.0		

Part Number:

148 NN X 3 X X 167

Pitch: 8-2.00mm (0.0787in)
Pin number: 01 ~ 40 PIN
Number of Rows: 1-Single Row 2-Double Row
Insulator Height: 3-2.80 & 3.00mm
Tail & Mounting Style: 3-Surface mount-perpendicular L-Surface mount-TypeL(单排左前右后) R-Surface mount-TypeR(单排右前左后)
PIN Code: (For PIN Socket):
0 - Tin / Tin
1 - Tin / Gold Flash
2 - Gold Flash / Gold Flash 1u"
3 - Tin / 0.075um gold 3u"
5 - Tin / 0.125um gold 5u"
6 - Tin / 0.25um gold 10u"
7 - Tin / 0.375um gold 15u"
8 - Tin / 0.75um gold 30u"

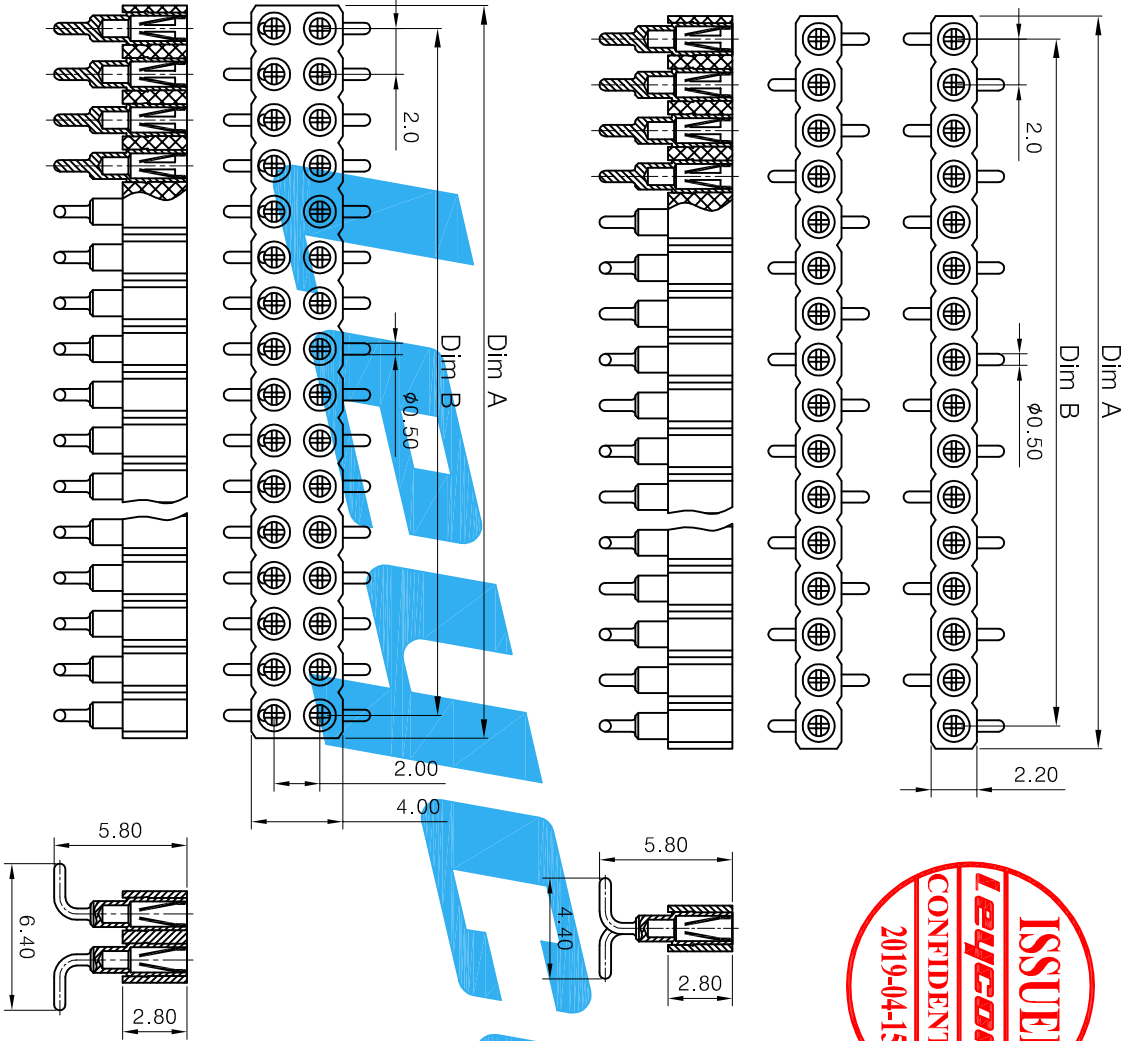

LEYCONN ELECTRONICS CO.,LTD.
LEYCONN 深圳市联益康电子有限公司
Http://www.leyconn.com
TEL: +86(755)26078616 FAX: 26070522

2.00mm SLP Socket
H=2.80mm S.M.T Type

REV A