
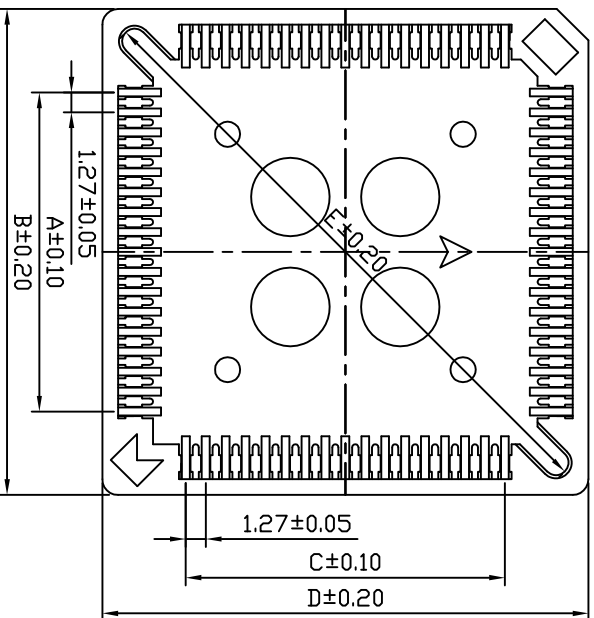


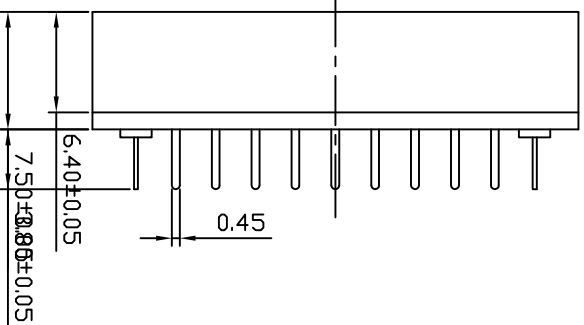


MATERIAL:

- *CONTACT MATERIAL:PHOSPHOR BRONZE JIS 5210
- *CONTACT PLATING:120u" (Min) TIN(Lead Free) OVER 30u"(Min) NICKEL
- *INSULATOR:HI-TEMP PPS G.F40% UL 94V-O, BROWN

SPECIFICATIONS:

- *TEMPERATURE RANGE: -25°C TO +105°C
- *CURRENT RATING:1 AMP
- *CAPACITANCE:1.0 PICO FARADS(MAX)
- *CONTACT RESISTANCE:30 MILLIOHMS(MAX)
- *INSULATION RESISTANCE:1000 MEGOHMS(MIN)
- *WITHSTANDING VOLTAGE:AC 500 V (RMS)

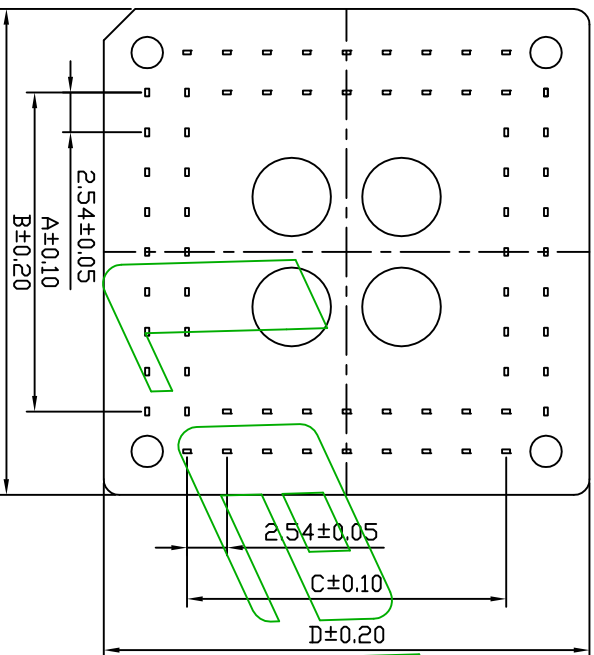

No. of Contacts	DIM A	DIM B	DIM C	DIM D	DIM E
20	5.08	15.50	5.08	15.50	17.20
28	7.62	18.04	7.62	18.04	20.70
32	7.62	18.04	10.16	20.60	22.65
44	12.70	23.48	12.70	23.48	27.50
52	15.24	25.88	15.24	25.88	31.50
68	20.32	31.04	20.32	31.04	39.00
84	25.40	36.04	25.40	36.04	46.15

129-XX S-1 0 2-00

Number of Postion:

20, 28, 32, 44, 52, 68, 84PIN

Tail & Mounting Style:

S = Straight DIP Type

Body Color:

1 = Brown

Packing method:

0 = Tube 1 = Tape Reel

Height over PC Board:

0 = 3.80mm 1 = 4.15mm

2 = 4.60mm

E		Units	mm	Scale	2:1	Drawing By	Date	leycomm			深圳市联益康电子有限公司		
D		Tolerance Unless				Vance	2004/07/12	Http://www.leycomm.com			TEL: +86 (755) 26078616 FAX: 26070522		
C		Otherwise Specified				Reviewed By	Date	Date	2004/07/12	Title	PLCC Socket		
B						Sandy	2004/07/12	Sheet	1 of 1		Straight DIP Type		
A		RELEASED				Approval By	Date	Thirt Angle Projection			Drawing No.		REV
REV		ECN. NO.				Date		Angle ~ ± 3°			F/Name		A