
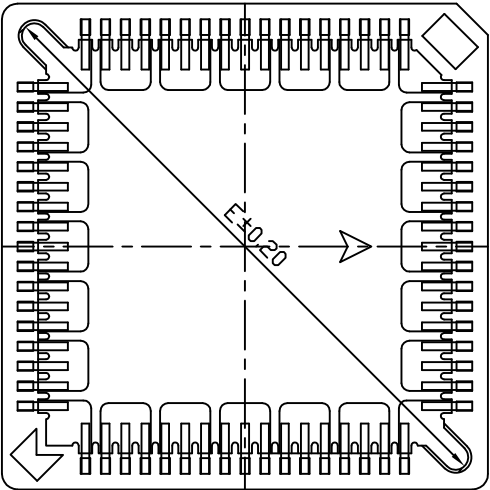


MATERIAL:

- *CONTACT MATERIAL:PHOSPHOR BRONZE JIS 5210
- *CONTACT PLATING:120u" (Min) TIN(Lead Free) OVER 30u"(Min) NICKEL
- *INSULATOR:HI-TEMP PPS G.F40% UL 94V-O, BROWN

SPECIFICATIONS:

- *TEMPERATURE RANGE: -25°C TO +105°C
- *CURRENT RATING:1 AMP
- *CAPACITANCE:1.0 PICOFORADS(MAX)
- *CONTACT RESISTANCE:30 MILLIOHMS(MAX)
- *INSULATION RESISTANCE:1000 MEGOHMS(MIN)
- *WITHSTANDING VOLTAGE:AC 500 V (RMS)

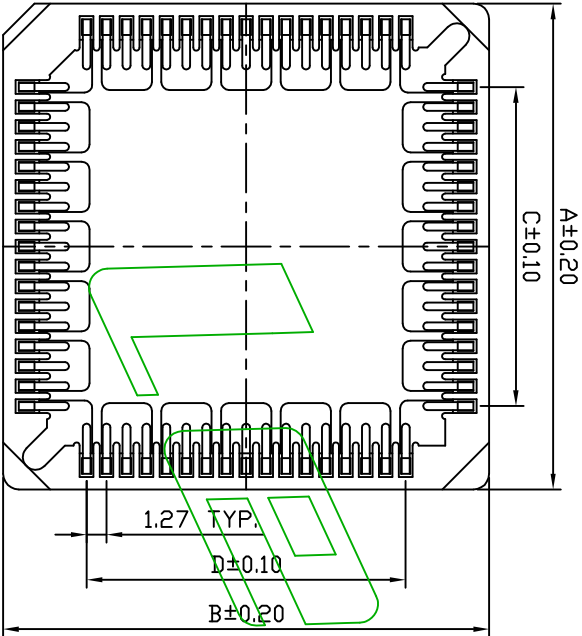

NO. OF CONTACTS	A	B	C	D	E
20	15.65	15.65	5.08	5.08	16.80
28	18.18	18.18	7.62	7.62	20.40
32	18.18	20.75	7.62	10.16	23.00
44	23.28	23.28	12.70	12.70	28.30
52	25.84	25.84	15.24	15.24	31.20
68	30.95	30.95	20.32	20.32	39.10
84	36.00	36.00	25.40	25.40	46.00

129-XX M-1 0 2-00

- Number of Postion:** 20, 28, 32, 44, 52, 68, 84PIN
- Tail & Mounting Style:** M = Straight S.M.T Type
- Body Color:** 1 = Brown
- Packing method:** 0 = Tube 1 = Tape Reel
- Height over PC Board:** 0 = 3.80mm 1 = 4.15mm 2 = 4.60mm

E		Units	mm	Scale	2:1	Drawing By	Date	leycom		深圳市联益康电子有限公司	
D		Tolerance Unless		Vance		2004/07/12		Http://www.leycom.com		TEL: +86 (755) 26078616	
C		Otherwise Specified		Reviewed By		Date		Date		FAX: 26070522	
B		.X ~ ±0.30		Sandy		2004/07/12		Title		PLCC Socket	
A		.XX ~ ±0.25		Approval By		Date		Thirt Angle Projection		Straight S.M.T Type	
REV		.XXX ~ ±0.20		Jon Chuo		2004/07/12		Drawing No.		REV	
		Angle ~ ± 3°						F/Name		A	