


Technical Specs:

Insulator: Glass-epoxy laminate FR-4
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3 (C36000)
Contact clip (6 finger): Beryllium copper (C17200)
Mating pins: Outside Diameter 0.30 to 0.35 mm
Forces: (polished steel gauge 0.30 mm)
Insertion: 0.3 N typ.
Withdrawal: 0.15 N typ.
Mechanical life: min 500 cycles
Rated current: 1 A
Contact resistance: max 10 Milliohms
Dielectric strength: min 500 V RMS

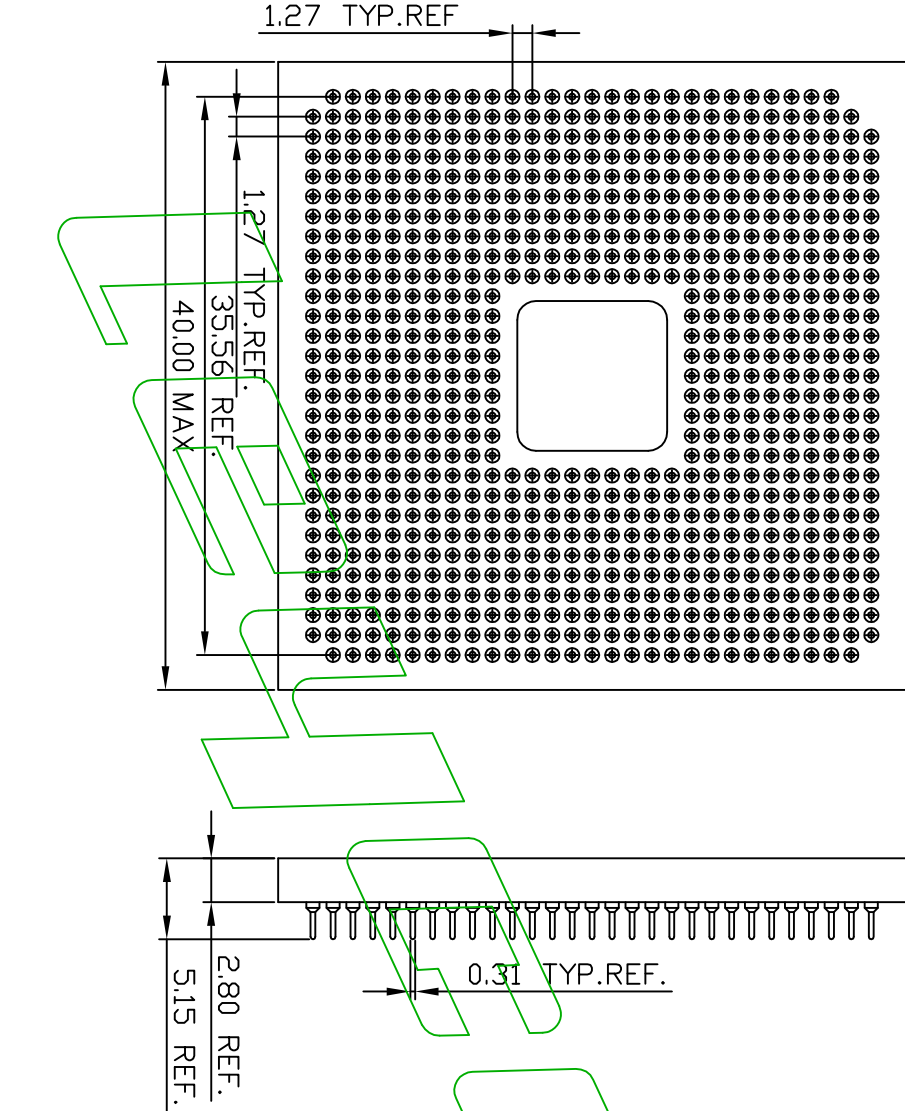

154-754-01 5-C2

Pitch: 4 = 1.27mm PGA Socket
Number of Position: 478 = 478 PIN
638 = 638 PIN
754 = 754 PIN
.....
Plated(Sleeve / Contact):
1 = Tin 200u" / Gold Flash
2 = Tin 200u" / Gold 5u"
3 = Tin 200u" / Gold 15u"
4 = Tin 200u" / Gold 30u"
5 = Gold Flash / Gold Flash
Insulator Material:
1 = FR-4
2 = PPS

E		Units	mm	Scale	≥1:1	Drawing By	Date	leycomm		深圳市联益康电子有限公司	
D		Tolerance Unless		Vance		2004/07/12		Http://www.leycomm.com		TEL: +86 (755) 26078616	
C		Otherwise Specified		Reviewed By		Date		Date		FAX: 26070522	
B		.X ~ ±0.30		Sandy		2004/07/12		Sheet		1 of 2	
A	RELEASED	.XX ~ ±0.25		Approval By		Date		Title		PGA Socket 754 Pin	
REV	ECN.NO.	.XXX ~ ±0.20		Date		2004/07/12		Thirt Angle Projection		Drawing No.	
		Angle ~ ± 3°		Jon Chuo		2004/07/12				F/Name	
										REV	
										A	