
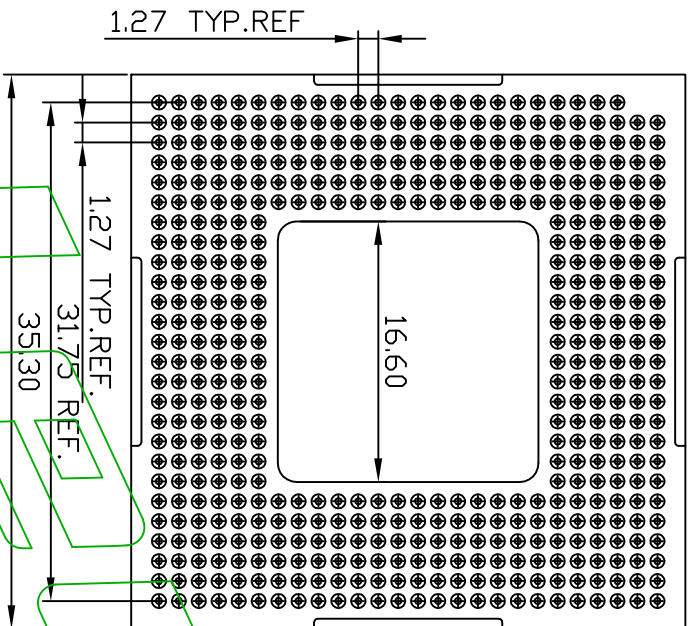


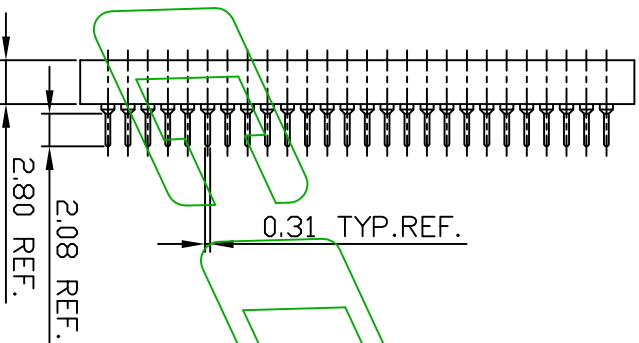

Technical Specs:

Insulator: Glass-epoxy laminate FR-4
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3 (C36000)
Contact clip (6 finger): Beryllium copper (C17200)
Mating pins: Outside Diameter 0.30 to 0.35 mm
Forces: (polished steel gauge 0.30 mm)
Insertion: 0.3 N typ.
Withdrawal: 0.15 N typ.
Mechanical life: min 500 cycles
Rated current: 1 A
Contact resistance: max 10 Milliohms
Dielectric strength: min 500 V RMS

154-478-01 5-C2

Pitch: _____

4 = 1.27mm PGA Socket

Number of Position: _____

478 = 478 PIN

638 = 638 PIN

754 = 754 PIN

.....

Insulator Material: _____

1 = FR-4

2 = PPS

Pin Size: _____

C1 = 4.85mm

C2 = 5.15mm

C3 = 5.50mm

Plated(Sleeve / Contact):

1 = Tin 200u" / Gold Flash

2 = Tin 200u" / Gold 5u"

3 = Tin 200u" / Gold 15u"

4 = Tin 200u" / Gold 30u"

5 = Gold Flash / Gold Flash

PGA Socket 478 Pin

E			Units	mm	Scale	2:1	Drawing By	Date	leyconn Http://www.leyconn.com 深圳市联益康电子有限公司 TEL.: +86 (755) 26078616 FAX: 26070522						
D			Tolerance Unless Otherwise Specified				Vance	2004/07/12							
C							Reviewed By	Date	Date						
B			.X ~ ±0.30				Sandy	2004/07/12	Sheet	1 of 2	Title	PGA Socket 478 Pin			
A			.XX ~ ±0.25 .XXX ~ ±0.20				Approval By	Date	Thirt Angle Projection				Drawing No.	REV	
REV			RELEASED ECN.NO.				Jon Chuo	2004/07/12					F/Name	A	
			Date												