This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

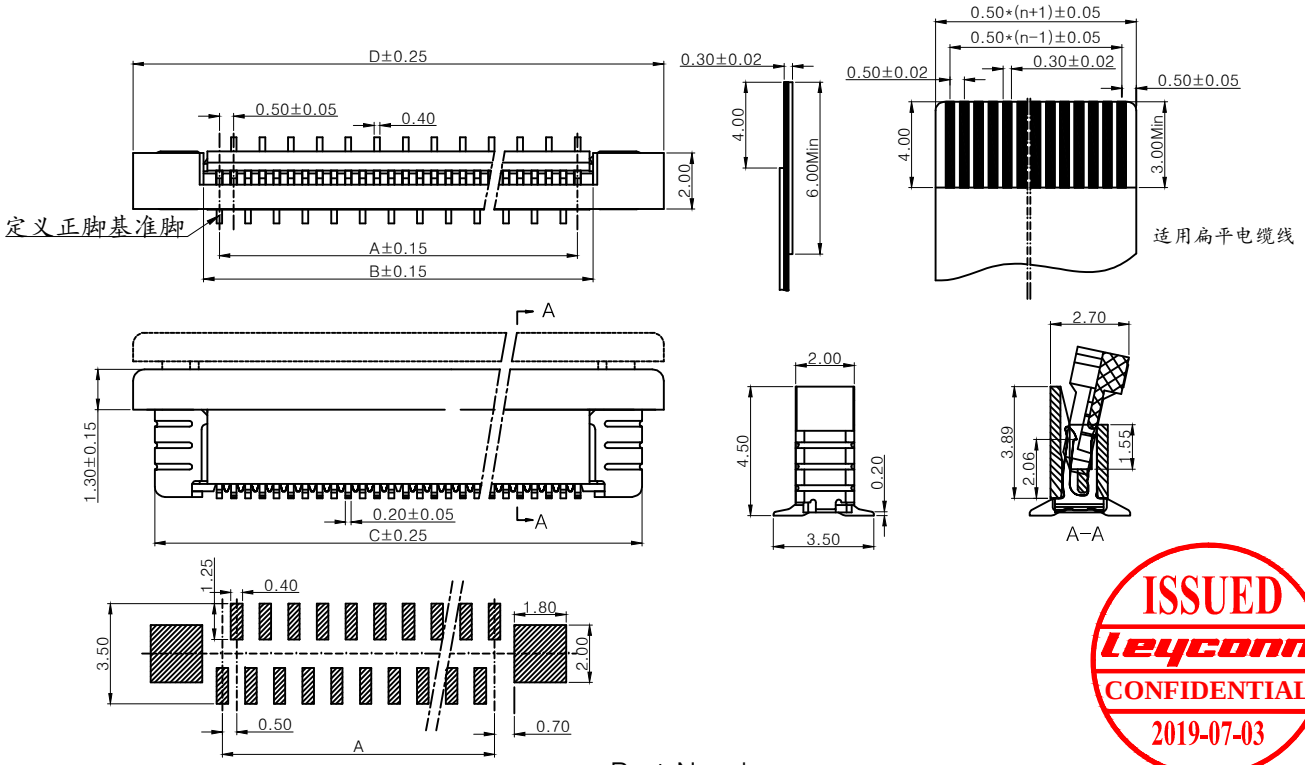

孔位 Poles	A	B	C	D	孔位 Poles	A	B	C	D
4	1.50	2.60	6.35	7.65	31	15.00	16.10	19.85	21.15
5	2.00	3.10	6.85	8.15	32	15.50	16.60	20.35	21.65
6	2.50	3.60	7.35	8.65	33	16.00	17.10	20.85	22.15
7	3.00	4.10	7.85	9.15	34	16.50	17.60	21.35	22.65
8	3.50	4.60	8.35	9.65	35	17.00	18.10	21.85	23.15
9	4.00	5.10	8.85	10.15	36	17.50	18.60	22.35	23.65
10	4.50	5.60	9.35	10.65	37	18.00	19.10	22.85	24.15
11	5.00	6.10	9.85	11.15	38	18.50	19.60	23.35	24.65
12	5.50	5.60	10.35	11.65	39	19.00	20.10	23.85	25.15
13	6.00	7.10	10.85	12.15	40	19.50	20.60	24.35	25.65
14	6.50	7.60	11.35	12.65	41	20.00	21.10	24.85	26.15
15	7.00	8.10	11.85	13.15	42	20.50	21.60	25.35	26.65
16	7.50	8.60	12.35	13.65	43	21.00	22.10	25.85	27.15
17	8.00	9.10	12.85	14.15	44	21.50	22.60	26.35	27.65
18	8.50	9.60	13.35	14.65	45	22.00	23.10	26.85	28.15
19	9.00	10.10	13.85	15.15	46	22.50	23.60	27.35	28.65
20	9.50	10.60	14.35	15.65	47	23.00	24.10	27.85	29.15
21	10.00	11.10	14.85	16.15	48	23.50	24.60	28.35	29.65
22	10.50	11.60	15.35	16.65	49	24.00	25.10	28.85	30.15
23	11.00	12.10	15.85	17.15	50	24.50	25.60	29.35	30.65
24	11.50	12.60	16.35	17.65	51	25.00	26.10	29.85	31.15
25	12.00	13.10	16.85	18.15	52	25.50	26.60	30.35	31.65
26	12.50	13.60	17.38	18.65	53	26.00	27.10	30.85	32.15
27	13.00	14.10	17.85	19.15	54	26.50	27.60	31.35	32.65
28	13.50	14.60	18.35	18.65	55	27.00	28.10	31.85	33.15
29	14.00	15.10	18.85	19.15	56	27.50	28.60	32.35	33.65
30	14.50	15.60	19.35	18.65	57	28.00	29.10	32.85	34.15
					58	28.50	29.60	33.35	34.65
					59	29.00	30.10	33.85	35.15
					60	29.50	30.60	34.35	35.65

ISSUED
Leyconn
CONFIDENTIAL
2019-07-03

Electrical:
Current rating: 0.4 ~ 0.5 Amp max
Dielectric Withstanding: 200 VAC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: >100 MΩ
Operating Temperature: -25°C ~ +85°C
Physical:
Material:LCP, UL 94V-0
Contacts: Phosphor Bronze
Contacts plating: Tin or Gold over Nickel
Fixed TAB : Copper Alloy
Fixed TAB plating: Tin over Nickel

Part Number:

592 8 NN 3 4 1 1 X J

- Series No.(Pitch): 2-0.50mm
- Outline option: 8
- Number of contact: 04 ~ 40 (NN)
- Type of terminations: 3-Surface mount-perpendicular
- Contact Style: 4-Top Entry
- Plating Code: 1-Tin over Nickel
- Stitch Position: 1- Right pin(正针)
- Packing Type: 1-Tube Packing; 2-Tape & Reel Packing; 3-Pallet Packing

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	03/07/19

Units: mm | Scale: 4:1

Tolerance Unless Otherwise Specified
.X ~ ±0.25
.XX ~ ±0.15
.XXX ~ ±0.05
Angle ~ ± 3°

Drawing By	Lin-Wu	Date 2019/07/03
Reviwed By	YP-Liang	Date 2019/07/03
Approval By	Kirby-Xiao	Date 2019/07/03

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Third Angle Projection

Title	0.5mm Pitch,A型立式 正脚
Part No.	5928NN3411XJ REV A