
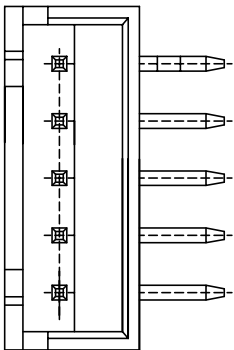
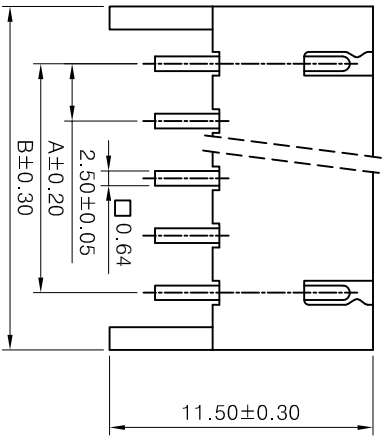


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS



SPECIFICATION:

◆ELECTRICAL

Pitch: 2.5 mm

Poles: 2~20

Voltage Rating: 250V DC/AC(rms)

Current Rating: 3 A

Contact Resistance: 20mΩ max

Insulation Resistance: 1000MΩ min

Withstand Voltage: 1000V AC/DC

◆MATERIAL

Housing: Nylon 66

Pin: Brass

◆ENVIRONMENT

Operating Temperature: -25°C to +85°C

Part Number:

6 09 1 E NN 2 1 3 X J

Series No.(Pitch):-

09-2.50mm

Contact Type:-

1 - PIN Header

Out option:-

No. Of Contact:-

02-20 Pin

Tail Style:-

2-Flight Angle Type

Packaging Options:

0-Plastic packaging

1-Try packaging PVC

2-Tape & Reel Packaging

3-Pallet packaging

Insulator Code:


3-White

Plating Code:

1-Tin over Nickel Plated

PIN HEADDEER

Poles	Dimensions(mm)		Poles	A	B
	A	B			
2	2.50	7.50	9	20.00	25.00
3	5.00	10.00	10	22.50	27.50
4	7.50	12.50	11	25.00	30.00
5	10.00	15.00	12	27.50	32.50
6	12.50	17.50	13	30.00	35.00
7	15.00	20.00	14	32.50	37.50
8	17.50	22.50	15	35.00	40.00
			20	47.50	52.50



leyconn

Http://www.leyconn.com

Sheet 1 of 1

Third Angle Projection

Part No.

6091ENN213XJ

LEYCONN ELECTRONICS CO.,LTD.

深圳市联益康电子有限公司

2.50mm Pitch wire to board connector

(XH带定位) 前后1P折K脚

6091ENN213XJ

REV A